



## Installation


## S17315 - 15W LED CCT Emergency Gear Tray




**1**  
Switch OFF at mains supply before installing




**2**  
Hold the base securely and twist to unlock and remove the diffuser




**3**  
Ensure product is located in the correct location and mark the fixing surface




**4**  
Use correct drill bit to drill screw holes




**5**  
Pull power supply through hole in the base plate and install screws




**6**  
Attach safety belt to gear tray

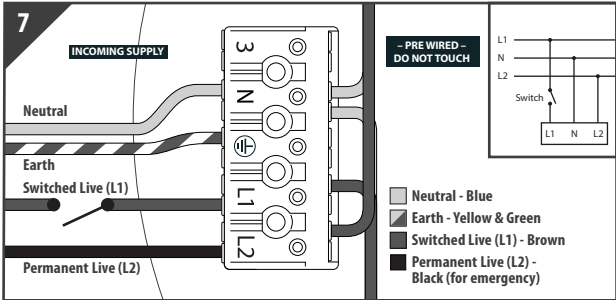


**7**  
Press the individual terminal and insert the correct incoming supply before releasing the terminal to secure. The product **MUST** be earthed  
Note: Please ensure there are no switches, PIRS etc in the permanent live feed, as switching of the emergency pack will reduce the battery's life considerably

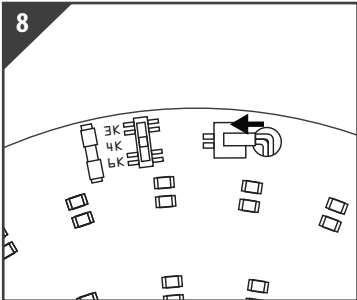


**8**  
Connect battery pack cable to lamp panel




**9**  
Change battery switch to 'ON' position




**10**  
Align gear tray with screws and tighten



**11**  
Use the CCT selection switch on the gear tray to select the desired colour temperature



**12**  
Push and twist the diffuser back into place



**13**  
Return power. Switch ON at mains supply

## Packaging Information

|        | SIZE(CM) | N.W/pc (KGS) | G.W.(KGS) | Q'TY(PCS) |
|--------|----------|--------------|-----------|-----------|
| Carton | 52*43*27 | 0.25         | 7.2       | 20        |

|                        | CTNS | Q'TY(PCS) | VOLUME(CBM) |
|------------------------|------|-----------|-------------|
| 20" standard container | 400  | 8000      | 28          |
| 40" standard container | 865  | 17300     | 58          |

