



LED Tube T8 9W G13



Product Overview

LED retrofit lamps are direct replacements for conventional incandescent, halogen, and compact fluorescent (CFL) lamps.

LEDs deliver higher lumens per watt (lm/W) which means significant energy savings while lasting more than ten times longer than incandescent sources. With their directional light, instant on and ability to dim, LEDs are fast becoming the light source of choice

Features

- More eco-valued.
- Glass tube, lower cost.
- 100lm/W, save more energy.

Safety and Maintenance

- Switch off supply before installing or removing lamp.
- Allow to cool before handling.
- Do not use in totally enclosed fittings as this will reduce lamp life.
- Do not dispose of in household waste.
- Dispose of in appropriate section of local civic amenity site or recycling centre.

Specifications – LED T8 TUBE

SKU	S9912	S9913
Lamp	G13	G13
Nominal Power (W)	9	9
Voltage	220-240Vac 50Hz	220-240Vac 50Hz
Current (mA)		
Nominal Luminous Flux (lm)	900	900
CCT (K)	4000K Cool White	6500K Day Light
Nominal Lifetime (h)	30000	30000
Dimmable	No	No
Switching Cycles	15000	15000
Warm-up time to 60% (S)	instant	instant
Length (mm)	600	600
Diameter (mm)	30	30
Mercury (mg)	0	0
Clean-up instructions	See website	See website
Retrofit	Yes	Yes
Equivalent Wattage (W)	18	18
Rated Power (W)	9	9
Rated Luminous Flux (lm)	900	900
Rated Lifetime (h)	30000	30000
Power Factor	0.9	0.9
Rated Peak Candelas (cd)		
Lumen Maintenance Factor at		
Nominal Lifetime	30000	30000
CRI	>80	>80
Start Time (s)	instant	instant
Ambient Temperature Range (°C)	-20 to 40	-20 to 40

Energy Label – LED T8 TUBE


Energy Class	A+	A+
Energy Consumption (kWh/1000h)	9.00 (30*)	9.00 (30)*

* The kWh/1000h value published on the energy label is required to be rounded up to an integer according to the EU implementing directive on Energy Labelling. The value to 2 decimal places is given for reference

Product Markings – LED T8 TUBE


Voltage	220-240Vac 50Hz	220-240Vac 50Hz
Nominal Power (W)	9	9
Current (mA)		
CE Mark	Yes	Yes
WEEE Mark	Yes	Yes
Batch Code	Yes	Yes

Dimensions

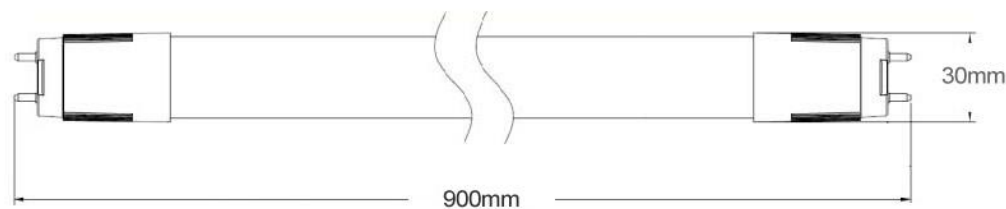

Photometric Information

S9912 4000K

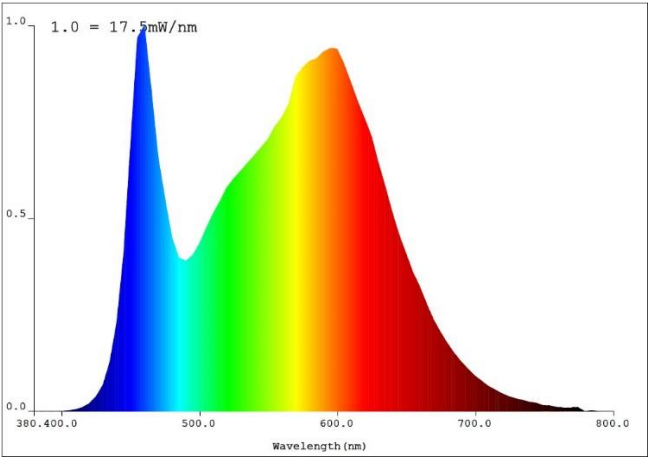

S9913 6500K

