

36W LED BACKLIT PANEL LIGHT

UGR < 22

600 x 600 x 27mm

SKU:S18701

INFORMATION

Measuring 595mm x 595mm x 27mm this new LUMiLiFe 36W Backlit LED panel (UGR<22) light typically replaces 4 x 600mm T8/T5 fluorescent tubes lights set in 600 x 600 grids. Which is why they're the popular lighting choice for hotels, factories, offices, schools, colleges, hospitals and the like. Energy use will be reduced by up to 50% when replacing fluorescent with LED panels and you'll notice a dramatic improvement in light quality.

FEATURES

- Lumens: 3600 +/- 5%
- Beam angle: 112 Degrees
- Life span: 30,000Hrs
- IP Rating: IP20
- Unified Glare Rating (UGR): <22*
- CE & RoHS Certified UKCA
- Uniform Light Distribution
- Non-Flicker Driver

*this panel allows the installation to comply with EN12464

TECHNICAL PARAMETER

- Input: AC 220-240V 50/60Hz 900mA
- Output Current: DC 27-42V 900mA
- LED Type: SMD
- Output Power: 36W
- Lens Material: PMMA
- Diffuser Material: PS
- ~~Sanan LED SMD Chip 2835~~

APPLICATIONS

- Hotels
- Conference/Meeting rooms
- Factories and offices
- Schools, colleges, universities and hospitals




LUMiLiFe is constantly developing and improving its products. For this reason, all product descriptions are intended as a general guide and we may change specifications time to time in the interest of product development, without prior notification or public announcement. Data in this sheet has been obtained in controlled experimental conditions. However, LUMiLiFe cannot accept any liability arising from the reliance on such data to the extent permitted by law.



SPECIFICATIONS

Model#	CCT	LED Type	Lumen (Lm) (±5%)	CRI	Beam Angle	Voltage (V)	PF	Weight (kg)
S18701	4,000K	SMD	3,600Lm 3820lm	>80	112° 110	AC220-240V	>0.9	1.4

DIMENSIONS (mm)

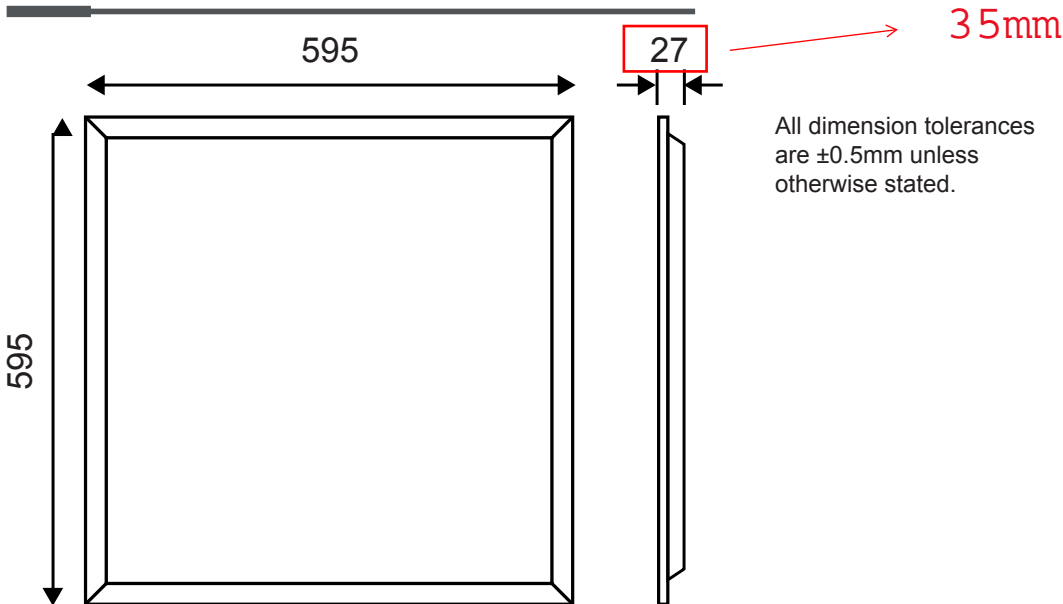

ACCESSORIES need to purchase seperate

- Hanging Kit for suspended installation
- Spring Clips
- Surface Mounted Clips
- External 3hr Emergency Pack (~~UK Manufactured~~)