LUMiLiFE

24W LED RECESSED CIRCULAR PANEL CCT

SKU:S18481


24W
92* Lumens/W
2200* Lumens

INFORMATION

The slim flat recessed LED panel downlight is suitable for most domestic and commercial applications such as bathrooms, shops, offices, stairwells, showrooms, kitchens, basements, corridors and many more areas. Measuring 297mm x 297mm x 15mm, making it ideal for small spaces. Product requires a 278mm diameter hole cut for installation. Easily accessible switches to adjust the colour temperature; Warm White, Cool White and Daylight.

Warranty: 3 Years **Lifespan:** 25,000hrs



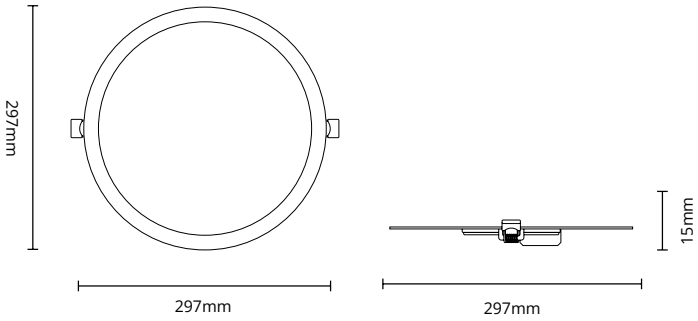

SPECIFICATIONS

Wattage	24W
Voltage	220-240V
Frequency	50/60Hz
Lumens	2200lm (±5%)
Colour Temperature	3,000K 4,000K 6,500K
Dimmable	No
Beam Angle	110°
Connection	Quick Fit
Operating Temperature	-20°C ~ 40°C
Weight	510g
IP Rating	IP20
Driver	Isolated
Safety Class	Class II

* Up to 2200 Lumens / 70 Lumens per Watt @ 4,000K Colour Temperature

OTHER MODELS

6W - 420lm - 119mm: S18478 **12W - 900lm - 168mm:** S18479
18W - 1,600lm - 221mm: S18480

UK CA CE RoHS Compliant

LumiLife is constantly developing and improving its products. For this reason, all product descriptions are intended as a general guide and we may change specifications time to time in the interest of product development, without prior notification or public announcement. Data in this sheet has been obtained in controlled experimental conditions. However, LumiLife cannot accept any liability arising from the reliance on such data to the extent permitted by law.
NOTE: PowerMaster is transitioning to LumiLife, during this time current stock may be delivered as PowerMaster.

ENABLED LED Luminaires and Retrofit Bulbs Licensing Program Member LedHut Ltd

THE BRITISH ASSESSMENT BUREAU ISO9001 THE BRITISH ASSESSMENT BUREAU ISO14001

www.supremeled.co.uk
0161 655 0660
orders@supreme.co.uk

Supreme PLC, 125 Trafford Wharf Road
Trafford Park, Manchester, M17 1HA

LUMiLiFE