



SUPREME

IMPORTS

LIGHTING CATALOGUE
EDITION 25

Energizer[®]

EVEREADY[®] **LUMiLiFE**

Order Online: www.supremeled.co.uk

Lamps

	Page
LED Elite	4 - 5
LED 15,000hr GLS	6 - 8
120cm Adjustable Pendant	9
LED 15,000hr Specialist	10
LED 15,000hr Pygmy & Cooker hood	11
LED 15,000hr Golf	12 - 13
LED 15,000hr Candle	14 - 15
LED 15,000hr Spotlight	16 - 17
LED 15,000hr Capsule	18 - 19
LED 15,000hr Reflector	20
LED 10,000hr Range	21
LED 25,000hr Tubes	22
Halogen Range	23
LED Everyday Smart Lighting	24 - 25
LED GLS	26 - 27
LED Golf	28 - 29
LED Candle	30 - 31
LED Spotlight	32 - 33
LED Reflector	34 - 35
Appliance Range	36 - 37
Pygmy Range	38
Specialist Range	39
Linear	40

Torches

LED Hand-held Range	44 - 45
LED Hands-free Range	46 - 47
LED Lantern Range	48

Display Solutions

CDU, FSDU, Metal Stands	49
-------------------------	----

Fittings

	Page	Item
LED Floodlights		
Eveready®	41	
Energizer®	42 - 43	
LumiLife	50	01 - 03
Highbays & Accessories	50 - 52	04 - 19
Emergency Light	53	20
Wall Pack	53	21
LED Bulkheads	53 - 54	22 - 25
	65 - 66	123 - 125
Ceiling Lights	54 - 55	26 - 30
Multi-Use GU10 Spotlight	56	31
CCT Dual Wattage Polo	56	32 - 35
Gear Tray / Bodies	56	36 - 46
LED Panels & Accessories	58 - 59	47 - 65
LED Drivers	59 - 60	66 - 68
Downlights	60	69 - 73
LED Battens & Accessories	61 - 63	74 - 110
Batten Fittings	64 - 65	111 - 122
Festoon	66	126 - 128
Worklights	67	129 - 132
Fire Rated Spotlights	68 - 69	133 - 144
IP65 Rated Spotlights	69	145 - 146
Fire & IP65 Rated Spotlights	70	147 - 149
Bar Spotlight	71	150 - 151
Spotlight	71	152 - 155
Desk Lamp	71	156 - 157
Standalone Photocell Sensor	71	158 - 159
PIR Standalone Sensor	72 - 73	160 - 161
Bulkheads	72 - 73	162 - 165
Outdoor Lanterns	73 - 74	166 - 169
Twin Wall Spotlights	74 - 75	170 - 171
PIR Sensor Spotlights	75	172 - 175

LED ELITE FILAMENT RANGE



High-efficiency A Rated LED's from Energizer. Lasting up to 50 years and using on average 60% less energy when compared to a conventional F Class LED lamp, the Energizer LED Elite range provides value for money without compromising on quality.

The Energizer Elite LED range simultaneously reduces electricity bills and CO₂ emissions.

- 50,000 hour life (over 3x longer than a standard LED lamp)
- 25,000 switching cycles
- Colour rendering index >80
- Clear finish
- 3 Colour temps; 2,700K, 4,000K and 6,500K
- 3 Shapes; GLS, Candle and Spotlight
- 4 Caps; BC-B22, ES-E27, SES-E14 and GU10
- Recommended for indoor use only

Energizer



S Code	Wattage/Equiv	Lumen	Cap	Temp	Beam Angle	Dimmable	CDU Qty	Finish	Energy Class
Candle									
S29638	2.2W/40W	470lm	B22	2700K	320°	No	12	Filament	A
S29639	2.2W/40W	470lm	B22	6500K	320°	No	12	Filament	A
S29640	2.2W/40W	470lm	E14	2700K	320°	No	12	Filament	A
S29641	2.2W/40W	470lm	E14	6500K	320°	No	12	Filament	A
S29636	2.2W/40W	470lm	E27	2700K	320°	No	12	Filament	A
S29637	2.2W/40W	470lm	E27	6500K	320°	No	12	Filament	A
GLS									
S29630	3.8W/60W	806lm	B22	2700K	320°	No	12	Filament	A
S29631	3.8W/60W	806lm	B22	6500K	320°	No	12	Filament	A
S29628	3.8W/60W	806lm	E27	2700K	320°	No	12	Filament	A
S29629	3.8W/60W	806lm	E27	6500K	320°	No	12	Filament	A
S29634	7.2W/100W	1521lm	B22	2700K	320°	No	12	Filament	A
S29635	7.2W/100W	1521lm	B22	6500K	320°	No	12	Filament	A
S29632	7.2W/100W	1521lm	E27	2700K	320°	No	12	Filament	A
S29633	7.2W/100W	1521lm	E27	6500K	320°	No	12	Filament	A
Spotlight									
S29642	2W/50W	360lm	GU10	2700K	36°	No	12	Opal	A
S29643	2W/50W	360lm	GU10	4000K	36°	No	12	Opal	A
S29644	2W/50W	360lm	GU10	6500K	36°	No	12	Opal	A



LED 15,000hr GLS



GLS (General Lamp Shade) is the common term for the pear-shaped lamps that have been the most popular design for decades. The most common type of GLS and used throughout this range, is the A60, which is 60mm in diameter.

As the most popular shape LED lamp, the GLS is a must-have in any lighting offering.

- 15,000 hour life
- 40,000 switching cycles
- Colour rendering index ≥ 80
- Opal, filament & tinted finishes
- 3 Colour temp; 2,700K, 4,000K and 6,500K
- 2 Caps; BC-B22 and ES-E27
- Recommend for indoor use only



S Code	Wattage/Equiv	Lumen	Cap	Temp	Dimmable	CDU Qty	Finish	Energy Class
S29775	4.2W/40W	470lm	B22	2700K		12	Opal	
S8857	4.2W/40W	470lm	B22	2700K	No	12	Opal	
S13575	4.2W/40W	470lm	B22	6500K	No	12	Opal	
S29776	4.2W/40W	470lm	E27	2700K		12	Opal	
S8859	4.2W/40W	470lm	E27	2700K	No	12	Opal	
S29777	4.2W/40W	470lm	E27	6500K	No	12	Opal	
S9420	7.3W/60W	806lm	B22	2700K		12	Opal	
S8862	7.3W/60W	806lm	B22	2700K	No	12	Opal	
S29782	7.3W/60W	806lm	B22	6500K		12	Opal	
S9421	7.3W/60W	806lm	B22	6500K	No	12	Opal	
S14543*	9W/60W	806lm	B22	Variable	Via Remote	12	Opal	
S9423	7.3W/60W	806lm	E27	2700K		12	Opal	
S8863	7.3W/60W	806lm	E27	2700K	No	12	Opal	
S29783	7.3W/60W	806lm	E27	6500K		12	Opal	
S8981	7.3W/60W	806lm	E27	6500K	No	12	Opal	
S14542*	9W/60W	806lm	E27	Variable	Via Remote	12	Opal	
S8864	9.5W/75W	1050lm	B22	2700K	No	12	Opal	
S9425	9.5W/75W	1050lm	B22	6500K	No	12	Opal	
S8706	9.5W/75W	1050lm	E27	2700K	No	12	Opal	
S9426	9.5W/75W	1050lm	E27	6500K	No	12	Opal	
S29778	12.6W/100W	1521lm	B22	2700K		12	Opal	
S8865	12.6W/100W	1521lm	B22	2700K	No	12	Opal	
S9427	12.6W/100W	1521lm	B22	6500K	No	12	Opal	
S29780	12.6W/100W	1521lm	B22	6500K		12	Opal	
S29779	12.6W/100W	1521lm	E27	2700K		12	Opal	
S8707	12.6W/100W	1521lm	E27	2700K	No	12	Opal	
S9428	12.6W/100W	1521lm	E27	6500K	No	12	Opal	
S29831	18W/150W	2452lm	B22	2700K	No	12	Opal	
S29832	18W/150W	2452lm	B22	6500K	No	12	Opal	
S29833	18W/150W	2452lm	E27	2700K	No	12	Opal	
S29834	18W/150W	2452lm	E27	6500K	No	12	Opal	
S29835	24.9W/200W	3452lm	B22	2700K	No	12	Opal	
S29836	24.9W/200W	3452lm	B22	6500K	No	12	Opal	
S29837	24.9W/200W	3452lm	E27	2700K	No	12	Opal	
S29838	24.9W/200W	3452lm	E27	6500K	No	12	Opal	
4 Packs								
S14056	8.5W/60W	806lm	B22	3000K	No	16	Opal	
S14062	8.5W/60W	806lm	B22	6500K	No	16	Opal	
S14057	8.5W/60W	806lm	E27	3000K	No	16	Opal	
S14423	14W/100W	1521lm	B22	3000K	No	16	Opal	
S14424	14W/100W	1521lm	E27	3000K	No	16	Opal	



LED 15,000hr GLS



When you need a more decorative GLS, the filament range is a must. A vintage feel that's just as bright as a regular LED, a filament lamp also offers a greater field of light, emitting close to a full sphere of light

- 15,000 hour life
- 40,000 switching cycles
- Colour rendering index ≥80
- Clear filament finish
- Colour temp; 2,700K
- Caps; BC-B22 and ES-E27
- Recommended for indoor use only



S Code	Wattage/Equiv	Lumen	Cap	Temp	Dimmable	CDU Qty	Finish	Energy Class
S12862	4W/40W	470lm	B22	2700K	No	12	Filament	E
S12849	5W/40W	550lm	B22	2700K	Yes	12	Filament	E
S12863	4W/40W	470lm	E27	2700K	No	12	Filament	E
S12850	5W/40W	550lm	E27	2700K	Yes	12	Filament	E
S12851	7W/60W	806lm	B22	2700K	Yes	12	Filament	E
S12864	7W/60W	806lm	B22	2700K	No	12	Filament	E
S12852	7W/60W	806lm	E27	2700K	Yes	12	Filament	E
S12865	7W/60W	806lm	E27	2700K	No	12	Filament	E
S12858	8W/75W	1050lm	E27	2700K	No	12	Filament	E
S12857	8W/75W	1060lm	B22	2700K	No	12	Filament	E



The perfect partner for our filament and specialist filaments (see pg 6 and 8).


S Code	Description
S14678	120cm Adjustable Pendant - Black
S14680	120cm Adjustable Pendant - Gun Metal
S14681	120cm Adjustable Pendant - Copper
S14682	120cm Adjustable Pendant - Antique Brass
S14683	120cm Adjustable Pendant - Brushed Chrome

LED 15,000hr Specialist



ST64 and Globe lamps are a perfect way to create a stylish and decorative finish. Particularly popular in the hospitality industry, specialist lamps are used to create a warm and inviting ambiance in restaurants, bars and bedrooms.

- 5,000 hour life
- 40,000 switching cycles
- Colour rendering index >80
- Gold and smokey with tinted filament finish
- 2 Colour temps; 2,000K (Gold) and 4,000K (Smokey)
- 2 Caps; BC-B22 and ES-E27
- Recommended for indoor use only

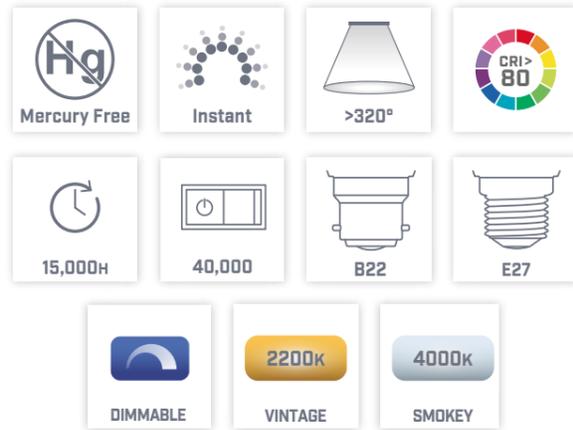

S Code	Wattage/Equiv	Lumen	Cap	Temp	Dimmable	CDU Qty	Finish	Energy Class
GLS								
S12859	4W/40W	440lm	B22	2200K	No	12	Filament Gold	E
S12860	4W/40W	440lm	E27	2200K	No	12	Filament Gold	E
G80								
S15031	4.5W/50W	400lm	E27	4000K	Yes	12	Filament Smokey	F
S15027	5W/40W	550lm	E27	2200k	Yes	12	Filament Gold	E
G95								
S9434	5W/40W	550lm	E27 (G95)	2200k	No	12	Filament Gold	E
S15028	5W/40W	550lm	E27 (G95)	2200k	Yes	12	Filament Gold	E
G125								
S9435	5W/40W	550lm	E27 (G125)	2200k	No	12	Filament Gold	E
S15029	5W/40W	550lm	E27 (G125)	2200k	Yes	12	Filament Gold	E
ST64								
S15030	4.5W/50W	400lm	E27 (ST64)	4000K	Yes	12	Filament Smokey	E
S9433	5W/40W	550lm	E27 (ST64)	2200k	No	12	Filament Gold	E
S15026	5W/40W	550lm	E27 (ST64)	2200k	Yes	12	Filament Gold	E
S9432	5W/40W	550lm	B22 (ST64)	2200k	No	12	Filament Gold	E

LED 15,000hr Pygmy & Cooker Hood



Used across many daily household appliances including cooker hoods, fridges, ovens and sewing machines, Pygmy lamps are a necessity for every home.

- 15,000 hour life
- 40,000 switching cycles
- Colour rendering index >80
- Clear filament finish
- 1 Colour temp; 3,000K
- 1 Cap; SES-E14
- Recommended for indoor use only



S Code	Wattage/Equiv	Lumen	Cap	Temp	Dimmable	CDU Qty	Finish	Energy Class
Pygmy								
S13561	2W/20W	240lm	E14	3000K	No	12	Filament	E
Pygmy Twin								
S13562	2W/20W	240lm	E14	3000K	No	12	Filament	E
Cooker Hood								
S13563	4W/35W	440lm	E14	3000K	No	12	Filament	E
Cooker Hood Twin								
S13564	4W/35W	440lm	E14	3000K	No	12	Filament	E

LED 15,000hr Golf



The golf shape lamp is a popular choice for many light fittings around the home and workplace. At 45mm in diameter, it's a small globe perfect for use in desk or table lamps.

- 15,000 hour life
- 40,000 switching cycles
- Colour rendering index >80
- Opal, filament and tinted finishes
- 2 Colour temps; 2,700K and 6,500K
- 4 Caps; SBC-B15, BC-B22, SES-E14 and ES-E27
- Recommended for indoor use only



Mercury Free	Instant	>180°	>320°	CRI >80	15,000H	40,000
B15	B22	E14	E27	DIMMABLE	2700k	6500k
					WARM WHITE	DAYLIGHT

S Code	Wattage/Equiv	Lumen	Cap	Temp	Dimmable	CDU Qty	Finish	Energy Class
S8834	2.2W/25W	250lm	B22	2700K	No	12	Opal	E
S8837	2.2W/25W	250lm	E14	2700K	No	12	Opal	E
S8836	2.2W/25W	250lm	E27	2700K	No	12	Opal	E
S29770	4.2W/40W	470lm	B15	2700K		12	Opal	E
S13570	4.2W/40W	470lm	B15	2700K	No	12	Opal	E
S29771	4.2W/40W	470lm	B22	2700K		12	Opal	E
S8838	4.2W/40W	470lm	B22	2700K	No	12	Opal	E
S29772	4.2W/40W	470lm	E14	2700K		12	Opal	E
S8841	4.2W/40W	470lm	E14	2700K	No	12	Opal	E
S9414	4.2W/40W	470lm	E14	6500K	No	12	Opal	E
S29773	4.2W/40W	470lm	E27	2700K		12	Opal	E
S8839	4.2W/40W	470lm	E27	2700K	No	12	Opal	E
S13572	4.2W/40W	470lm	E27	6500K	No	12	Opal	E
Filament								
S29788	4W/40W	470lm	B15	2700K	No	12	Filament	E
S29789	5W/40W	550lm	B15	2700K		12	Filament	E
S12871	4W/40W	470lm	B22	2700K	No	12	Filament	E
S29787	5W/40W	470lm	B22	2700K		12	Filament	E
S12872	4W/40W	470lm	E14	2700K	No	12	Filament	E
S29790	5W/40W	550lm	E14	2700K		12	Filament	E
S29791	4W/40W	470lm	E27	2700K	No	12	Filament	E
S29792	5W/40W	550lm	E27	2700K		12	Filament	E



LED 15,000hr Candle



Designed to look like the flame from a candle and therefore a popular choice for chandeliers and wall lights, Candle shape lamps are amongst some of our best sellers.

- 15,000 hour life
- 40,000 switching cycles
- Colour rendering index >80
- Opal, filament and tinted finishes
- 2 Colour temps; 2,700K and 6,500K
- 4 Caps; SBC-B15, BC-B22, SES-E14 and ES-E27
- Recommended for indoor use only



S Code	Wattage/Equiv	Lumen	Cap	Temp	Dimmable	CDU Qty	Finish	Energy Class
S8843	2.2W/25W	250lm	B22	2700K	No	12	Opal	E
S8845	2.2W/25W	250lm	E14	2700K	No	12	Opal	E
S29766	4.2W/40W	470lm	B15	2700K	Yes	12	Opal	E
S29740	4.2W/40W	470lm	B15	6500K	No	12	Opal	E
S8878	4.2W/40W	470lm	B15	2700K	No	12	Opal	E
S29767	4.2W/40W	470lm	B22	2700K	Yes	12	Opal	E
S29744	4.2W/40W	470lm	B22	6500K	No	12	Opal	E
S8850	4.2W/40W	470lm	B22	2700K	No	12	Opal	E
S9416	4.2W/40W	470lm	B22	6500K	No	12	Opal	E
S29768	4.2W/40W	470lm	E14	2700K	Yes	12	Opal	E
S8851	4.2W/40W	470lm	E14	2700K	No	12	Opal	E
S9418	4.2W/40W	470lm	E14	6500K	No	12	Opal	E
S29769	4.2W/40W	470lm	E27	2700K	Yes	12	Opal	E
S8880	4.2W/40W	470lm	E27	2700K	No	12	Opal	E
S13574	4.2W/40W	470lm	E27	6500K	No	12	Opal	E
S29822	7.3W/60W	806lm	B15	2700K	Yes	12	Opal	E
S29821	7.3W/60W	806lm	B22	2700K	Yes	12	Opal	E
S17355	7.3W/60W	806lm	B22	2700K	No	12	Opal	E
S29824	7.3W/60W	806lm	E14	2700K	Yes	12	Opal	E
S17359	7.3W/60W	806lm	E14	2700K	No	12	Opal	E
S17365	7.3W/60W	806lm	E14	6500K	No	12	Opal	E
S29823	7.3W/60W	806lm	E27	2700K	Yes	12	Opal	E
4 Packs								
S14331	4.9W/40W	470lm	B22	3000K	No	12	Opal	F
S14330	4.9W/40W	470lm	E14	3000K	No	12	Opal	F
Filament								
S12867	2W/20W	250lm	E14	2700K	No	12	Filament	E
S12861	2.5W/20W	275lm	E14	2200K	No	12	Filament Gold	E
S29785	4W/40W	470lm	B15	2700K	No	12	Filament	E
S29784	5W/40W	550lm	B15	2700K	Yes	12	Filament	E
S12868	4W/40W	470lm	B22	2700K	No	12	Filament	E
S12855	5W/40W	550lm	B22	2700K	Yes	12	Filament	E
S12869	4W/40W	470lm	E14	2700K	No	12	Filament	E
S12856	5W/40W	550lm	E14	2700K	Yes	12	Filament	E
S12870	4W/40W	470lm	E27	2700K	No	12	Filament	E
S29786	5W/40W	550lm	E27	2700K	Yes	12	Filament	E

LED 15,000hr Spotlight



GU10 and GU5.3 Spotlights are designed to fit into downward lighting fixtures. Usually designed with a focused beam, the Energizer range of spotlight lamps come with a wider beam angle for a softer focus.

- 15,000 hour life
- 40,000 switching cycles
- Colour rendering index >80
- Opal and glass finishes
- 3 Colour temps; 2,700K, 4,000K and 6,500K
- 2 Caps ; GU10 and GU5.3
- Recommended for indoor use only

Energizer



S Code	Wattage/Equiv	Lumen	Cap	Temp	Beam Angle	Dimmable	CDU Qty	Finish	Energy Class
GU10 Glass									
S9410	3.6W/50W	345lm	GU10	3000K	36°		12	Glass	
S9408	3.6W/50W	345lm	GU10	3000K	36°	No	12	Glass	
S9409	3.6W/50W	345lm	GU10	4000K	36°	No	12	Glass	
S9411	3.6W/50W	345lm	GU10	4000K	36°		12	Glass	
GU10 Opal									
S8821	2.4W/35W	230lm	GU10	3000K	36°	No	12	Opal	
S8822	2.4W/35W	230lm	GU10	4000K	36°	No	12	Opal	
S14544	4.2W/40W	250lm	GU10	CCT	120°	Via Remote	12	Opal	
S29825	4W/40W	450lm	GU10	3000K	120°		12	Opal	
S29826	4W/40W	450lm	GU10	4000K	120°		12	Opal	
S29827	4W/40W	450lm	GU10	6500K	120°		12	Opal	
S8826	3.6W/50W	345lm	GU10	3000K	36°		12	Opal	
S8823	3.6W/50W	345lm	GU10	3000K	36°	No	12	Opal	
S8825	3.6W/50W	345lm	GU10	4000K	36°	No	12	Opal	
S8827	3.6W/50W	345lm	GU10	4000K	36°		12	Opal	
S29774	3.6W/50W	345lm	GU10	6500K	36°		12	Opal	
S9403	3.6W/50W	345lm	GU10	6500K	36°	No	12	Opal	
S9405	4.8W/60W	450lm	GU10	3000K	36°	No	12	Opal	
S9406	4.8W/60W	450lm	GU10	4000K	36°	No	12	Opal	
S9407	4.8W/60W	450lm	GU10	6500K	36°	No	12	Opal	
GU10 4 Packs									
S14425	4.9W/40W	345lm	GU10	3000K	38°	No	21	Opal	
S15161	4.9W/40W	345lm	GU10	4000K	38°	No	21	Opal	
S14426	4.9W/40W	345lm	GU10	6500K	38°	No	21	Opal	
S10327	3.6W/50W	345lm	GU10	3000K	36°		12	Opal	
S10328	3.6W/50W	345lm	GU10	4000K	36°		12	Opal	
S10329	3.6W/50W	345lm	GU10	6500K	36°	Yes	12	Opal	
MR16									
S8832	3.6W/40W	345lm	GU5.3	3000K	36°	No	12	Opal	
S8833	3.6W/40W	345lm	GU5.3	4000K	36°	No	12	Opal	



LED 15,000hr Capsule



LED Capsules are available in G4 and G9 caps. G4 capsules are lower voltage and therefore used in cooker hoods and integrated spotlights, whereas G9 capsules operate on mains voltage.


- 15,000 hour life
- 40,000 switching cycles
- Colour rendering index ≥80
- Clear finish
- 3 Colour temps; 2,700K, 4,000K and 6,500K
- 2 Caps; G4 and G9
- Recommended for indoor use only



Energizer



S Code	Wattage/Equip	Lumen	Cap	Temp	Dimmable	CDU Qty	Finish	Energy Class
G4								
S18744	1.2W/9W	90lm	G4	2700K	No	12	Clear	G
S18745	1.2W/9W	90lm	G4	6500K	No	12	Clear	G
S18746	1.8W/20W	215lm	G4	2700K	No	12	Clear	E
S18747	1.8W/20W	215lm	G4	6500K	No	12	Clear	E
G9								
S18748	1.8W/20W	200lm	G9	2700K	No	12	Clear	E
S18749	1.8W/20W	200lm	G9	6500K	No	12	Clear	E
S29828	4.2W/40W	470lm	G9	2700K		12	Clear	E
S18750	4.2W/40W	470lm	G9	2700K	No	12	Clear	E
S29829	4.2W/40W	470lm	G9	4000K		12	Clear	E
S18751	4.2W/40W	470lm	G9	4000K	No	12	Clear	E
S29830	4.2W/40W	470lm	G9	6500K		12	Clear	E
S18752	4.2W/40W	470lm	G9	6500K	No	12	Clear	E
G9 Twin Packs								
S29489	1.8W/20W	200lm	G9	2700K	No	12	Clear	E
S29490	1.8W/20W	200lm	G9	6500K	No	12	Clear	E
S29491	4.2W/40W	470lm	G9	2700K	No	12	Clear	E
S29492	4.2W/40W	470lm	G9	4000K	No	12	Clear	E
S29493	4.2W/40W	470lm	G9	6500K	No	12	Clear	E

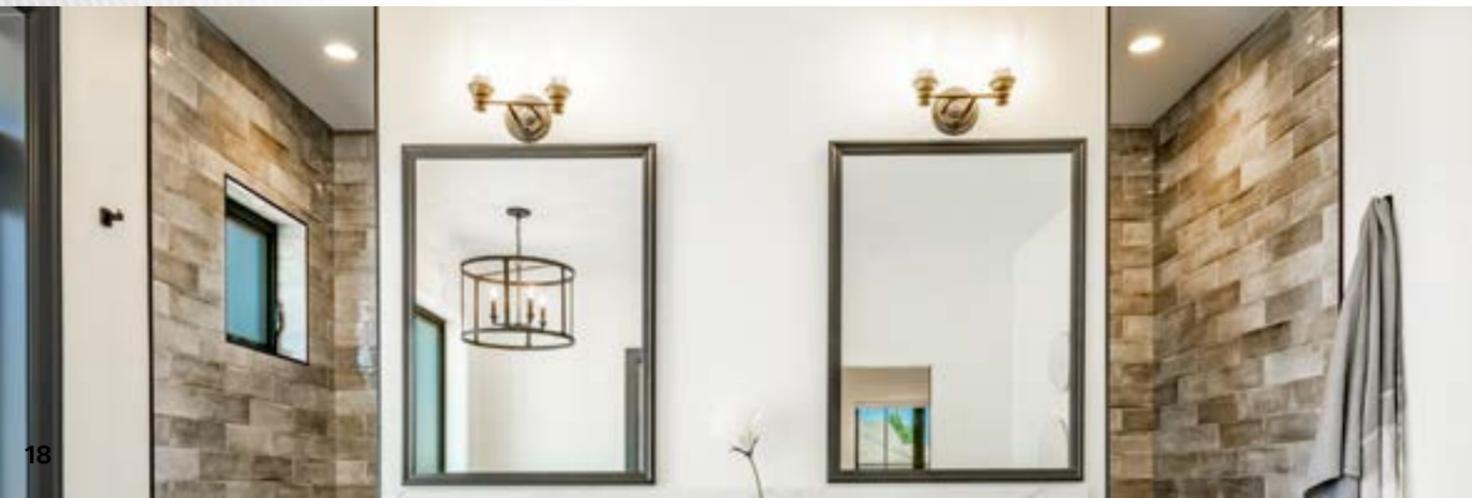


LED 15,000hr Reflector



Widely used in commercial and industrial applications, Reflectors come in either an Edison screw base (E27) or a Small Edison screw base (E14).

The number after the R denotes the bulb's diameter in mm.

- 15,000 hour life
- 40,000 switching cycles
- 2700K
- Colour rendering index ≥ 80
- Opal finish
- 1 Colour temp; 2,700K
- 2 Caps; SES-E14 and ES-E27
- Recommended for indoor use only

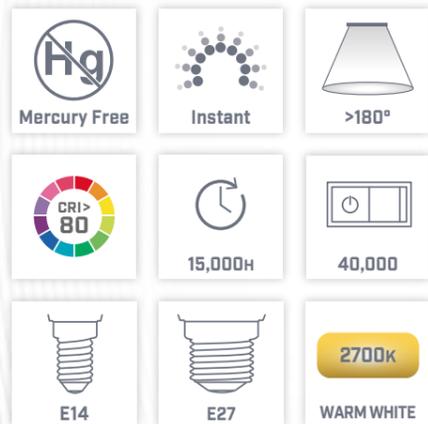

S Code	Wattage/Equiv	Lumen	Cap	Temp	Dimmable	CDU Qty	Finish	Energy Class
R50 Reflector								
S9014	4.2W/40W	470lm	E14	2700K	No	12	Opal	E
R63 Reflector								
S9015	7.3W/60W	806lm	E27	2700K	No	12	Opal	E
R80 Reflector								
S9016	7.3W/60W	806lm	E27	2700K	No	12	Opal	E

LED 10,000hr Range

Our range of 10,000 hour Energizer LED lamps are the perfect option for customers wanting a good product for a great price. Featuring the most popular every-day lamps, the range has something for everyone.



- 10,000 hour life
- 40,000 switching cycles
- 2700K
- Colour rendering index ≥ 80
- Opal finish
- 1 Colour temp; 2,700K
- Caps; BC-B22, SES-E14 and ES-E27
- Recommended for indoor use only




S Code	Wattage/Equiv	Lumen	Cap	Temp	Beam Angle	Dimmable	CDU Qty	Finish	Energy Class
Candle									
S16707	4.2W/40W	470lm	B22	3000K	180°	No	6	Opal	E
S16706	4.2W/40W	470lm	E14	3000K	180°	No	6	Opal	E
GLS									
S16709	7.3W/60W	806lm	B22	3000K	180°	No	6	Opal	E
S16710	7.3W/60W	806lm	E27	3000K	180°	No	6	Opal	E
Golf									
S16708	4.2W/40W	470lm	E14	3000K	180°	No	6	Opal	E
Spotlight									
S16705	3.6W/50W	345lm	GU10	3000K	36°	No	6	Opal	E

LED 25,000hr Tubes

LED tubes are used in a number of commercial and industrial settings. Available in various lengths with compatible battens (please see page 64), Energizer tubes provide value for money across the range. CCT Adjustable options available.



- 25,000 hour life
- 50,000 switching cycles
- 2700K, 4000K & 6500K
- Colour rendering index ≥80
- Opal finish
- 3 Colour temps; 2,700K, 4,000K and 6,500K
- 2 Caps; S15 and G13
- Recommended for indoor use only

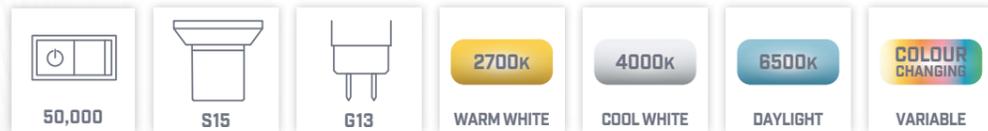


S Code	Size	Wattage	Lumen	Cap	Temp	Dimmable	CDU Qty	Energy Class
S15 Strip tube								
S9217	221mm	4W	350lm	S15	2700K	No	12	F
S9218	284mm	6W	550lm	S15	2700K	No	12	F
T8								
S9912	2ft	9W	1080lm	G13	4000K	No	12	E
S9913	2ft	9W	1080lm	G13	6500K	No	12	E
S28632	2ft	9W	1080lm	G13	CCT Adjustable	No	25	E
S8912	4ft	18W	2160lm	G13	4000K	No	12	E
S8914	4ft	18W	2160lm	G13	6500K	No	12	E
S28633	4ft	18W	2160lm	G13	CCT Adjustable	No	25	E
S8913	5ft	22W	2649lm	G13	4000K	No	12	E
S8915	5ft	22W	2649lm	G13	6500K	No	12	E
S28634	5ft	22W	2649lm	G13	CCT Adjustable	No	25	E
S9914	6ft	30W	3600lm	G13	4000K	No	12	E
S9915	6ft	30W	3600lm	G13	6500K	No	12	E
S29325	6ft	30W	3600lm	G13	CCT Adjustable	No	25	E

Halogen Range

Linear halogen bulbs are commonly used in security lights, floodlights and up-lighters. They are available in two standard sizes, 78mm or 118mm, both of which have R7s caps. All halogen linear bulbs are dimmable.



- 2,000 hour life
- 8,000 switching cycles
- 2900K
- Colour rendering index = 100
- Clear finish
- 1 Cap; Linear cap
- Recommended for external weather-proof fitting

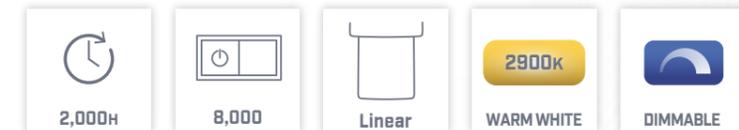

S Code	Size	Wattage/Equiv	Lumen	Cap	Temp	Dimmable	CDU Qty	Energy Class
S5773	78x8mm	80W	1400lm	R7S	2900K	Dimmable	50	G
S5160*	78x8mm	120W	2250lm	R7S	2900K	Dimmable	10	G
S5414	78x8mm	120W	2250lm	R7S	2900K	Dimmable	50	G
S5161*	118x8mm	120W	2250lm	R7S	2900K	Dimmable	10	G
S5415	118x8mm	120W	2250lm	R7S	2900K	Dimmable	50	G

* Blister packaging of 2

LED Everyday Smart



Powered by Tuya, the Energizer Smart range works seamlessly with Google Home and Alexa to bring Smart lighting to your home. Control your lighting, home security and power sockets from the palm of your hand, wherever you are in the world.

- 20,000 & 25,000 hour life
- 15,000 switching cycles
- Colour rendering index ≥80
- Clear and opal finish
- 3 Colour temps; 3,000K, RGB and CCT
- 4 Shapes; GLS, Candle, Strip and Spotlight
- 4 Caps; BC-B22, ES-E27, SES-E14 and GU10
- Recommended for indoor use only


Energizer



Mercury Free	Instant	>36°	>120°	>180°	>200°	CRI >80	20,000H	25,000H
15,000	GU10	B22	E14	E27	USB	3000K WARM WHITE	COLOUR CHANGING VARIABLE	


S Code	Wattage/Equiv	Lumen	Cap	Temp	Beam Angle	Dimmable	CDU Qty	Finish	Energy Class
Candle									
S18461	4.8W/40W	450lm	E14	RGB & CCT	180°	Via App	10	Opal	F
GLS									
S18459	8.5W/60W	806lm	B22	RGB & CCT	180°	Via App	10	Opal	F
S18460	8.5W/60W	806lm	E27	RGB & CCT	180°	Via App	10	Opal	F
S18477	6.5W/60W	700lm	E27	CCT	200°	Via App	12	Filament	F
Spotlight									
S18462	4.8W/50W	345lm	GU10	RGB & CCT	36°	Via App	12	Opal	G
Flexi Strips									
S17164	12W	1200lm*	USB	RGB & 3000K	120°	Via App	12	5m Strip	G
S18468	24W	2400lm*	USB	RGB & 3000K	120°	Via App	12	10m Strip	G
Smart Plug									
S17165	≤0.7 in Standby	N/A	3 Pin	N/A	N/A	No	12	Opal	N/A

* Total lumens based on 6,500Kelvin

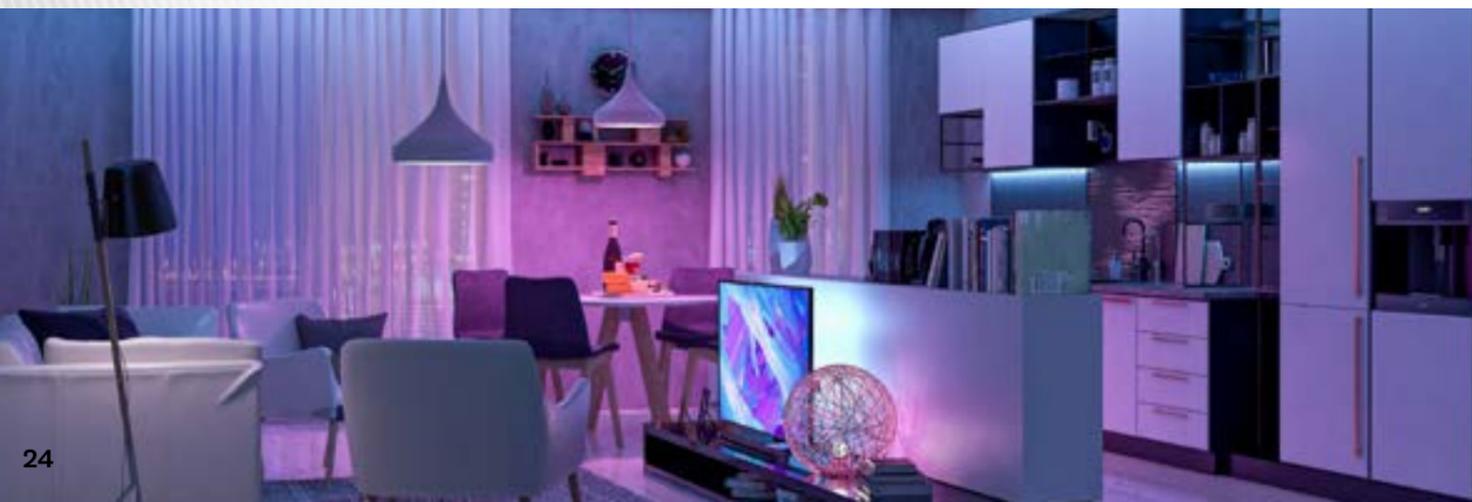



GLS (General Lamp Shade) is the common term for the pear-shaped lamps that have been the most popular design for decades. The most common type of GLS and used throughout this range, is the A60, which is 60mm in diameter.

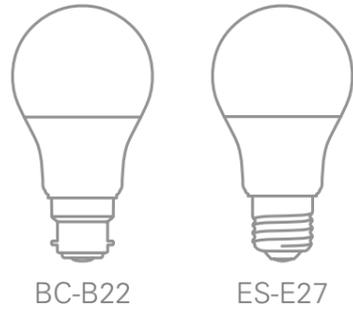

Bulb Life
10 years / 10,000 Hrs

Switching Cycles
>10,000 on/off cycles

Voltage
220-240V ~ 50/60Hz

Beam Angle
200°, 320°

Colour Render Index
>80

Mercury Free
100% Mercury free

Colour Temperature
3,000 Kelvin

Colour Temperature
4,000 Kelvin

Colour Temperature
6,500 Kelvin




S Code	Wattage/Equiv	Lumen	Cap	Temp	Dimmable	CDU Qty	Finish	Energy Class
Box of 1								
S13618	4.9W/40W	470lm	B22	3000K	No	5	Opal	F
S14312	4.9W/40W	470lm	B22	4000K	No	5	Opal	F
S13619	4.9W/40W	470lm	B22	6500K	No	5	Opal	F
S13620	4.9W/40W	470lm	E27	3000K	No	5	Opal	F
S14313	4.9W/40W	470lm	E27	4000K	No	5	Opal	F
S13621	4.9W/40W	470lm	E27	6500K	No	5	Opal	F
S13622	8.8W/60W	806lm	B22	3000K	No	5	Opal	F
S14314	8.8W/60W	806lm	B22	4000K	No	5	Opal	F
S13623	8.8W/60W	806lm	B22	6500K	No	5	Opal	F
S13624	8.8W/60W	806lm	E27	3000K	No	5	Opal	F
S14315	8.8W/60W	806lm	E27	4000K	No	5	Opal	F
S13625	8.8W/60W	806lm	E27	6500K	No	5	Opal	F
S13626	13.8W/100W	1521lm	B22	3000K	No	5	Opal	E
S14316	13.8W/100W	1521lm	B22	4000K	No	5	Opal	E
S13627	13.8W/100W	1521lm	B22	6500K	No	5	Opal	E
S13628	13.8W/100W	1521lm	E27	3000K	No	5	Opal	E
S14317	13.8W/100W	1521lm	E27	4000K	No	5	Opal	E
S13629	13.8W/100W	1521lm	E27	6500K	No	5	Opal	E
Box of 2								
S15301	8.8W/60W	806lm	B22	3000K	No	6	Opal	F
S15302	8.8W/60W	806lm	B22	6500K	No	6	Opal	F
S15303	8.8W/60W	806lm	E27	3000K	No	6	Opal	F
S15304	8.8W/60W	806lm	E27	6500K	No	6	Opal	F
S15305	13.8W/100W	1521lm	B22	3000K	No	6	Opal	E
S15306	13.8W/100W	1521lm	B22	6500K	No	6	Opal	E
S15307	13.8W/100W	1521lm	E27	3000K	No	6	Opal	E
S15308	13.8W/100W	1521lm	E27	6500K	No	6	Opal	E
Filament - Box of 1								
S15483	4W/40W	470lm	B22	2700K	No	5	Filament	E
S15484	4W/40W	470lm	E27	2700K	No	5	Filament	E
S15485	7W/60W	806lm	B22	2700K	No	5	Filament	E
S15486	7W/60W	806lm	E27	2700K	No	5	Filament	E
S15487	8W/75W	1050lm	B22	2700K	No	5	Filament	E
S15488	8W/75W	1050lm	E27	2700K	No	5	Filament	E
Filament - Box of 2								
S17401	7W/60W	806lm	B22	2700K	No	6	Filament	E





The golf shape lamp is a popular choice for many light fittings around the home and workplace. At 45mm in diameter, it's a small globe perfect for use in desk or table lamps.

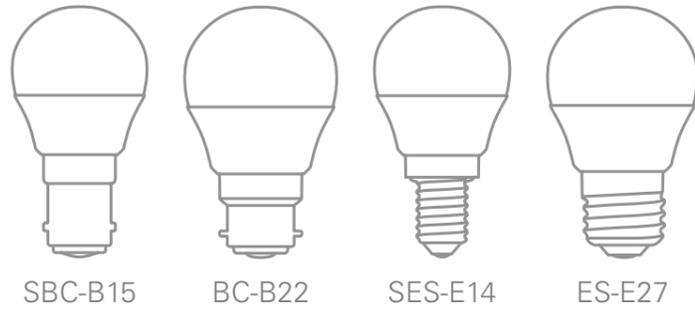

Bulb Life
10 years / 10,000 Hrs

Switching Cycles
>10,000 on/off cycles

Voltage
220-240V ~ 50/60Hz

Beam Angle
200°, 320°

Colour Render Index
>80

Mercury Free
100% Mercury free

Colour Temperature
2,700- 3,000 Kelvin

Colour Temperature
4,000 Kelvin

Colour Temperature
6,500 Kelvin




S Code	Wattage/Equiv	Lumen	Cap	Temp	Dimmable	CDU Qty	Finish	Energy Class
Box of 1								
S13604	4.9W/40W	470lm	B15	3000K	No	5	Opal	F
S13605	4.9W/40W	470lm	B15	6500K	No	5	Opal	F
S13602	4.9W/40W	470lm	B22	3000K	No	5	Opal	F
S14320	4.9W/40W	470lm	B22	4000K	No	5	Opal	F
S13603	4.9W/40W	470lm	B22	6500K	No	5	Opal	F
S13608	4.9W/40W	470lm	E14	3000K	No	5	Opal	F
S14321	4.9W/40W	470lm	E14	4000K	No	5	Opal	F
S13609	4.9W/40W	470lm	E14	6500K	No	5	Opal	F
S13606	4.9W/40W	470lm	E27	3000K	No	5	Opal	F
S13607	4.9W/40W	470lm	E27	6500K	No	5	Opal	F
Box of 2								
S15293	4.9W/40W	470lm	B22	3000K	No	6	Opal	F
S15295	4.9W/40W	470lm	E14	3000K	No	6	Opal	F
S15296	4.9W/40W	470lm	E14	6500K	No	6	Opal	F
S15333	4.9W/40W	470lm	E27	3000K	No	6	Opal	F
Filament - Box of 1								
S15480	4W/40W	470lm	B15	2700K	No	5	Filament	E
S15479	4W/40W	470lm	B22	2700K	No	5	Filament	E
S15482	4W/40W	470lm	E14	2700K	No	5	Filament	E
S15481	4W/40W	470lm	E27	2700K	No	5	Filament	E
Filament - Box of 2								
S17398	4W/40W	470lm	B22	2700K	No	6	Filament	E
S17400	4W/40W	470lm	E14	2700K	No	6	Filament	E





Designed to look like the flame from a candle and therefore a popular choice for chandeliers and wall lights, Candle shape lamps are amongst some of our best sellers.

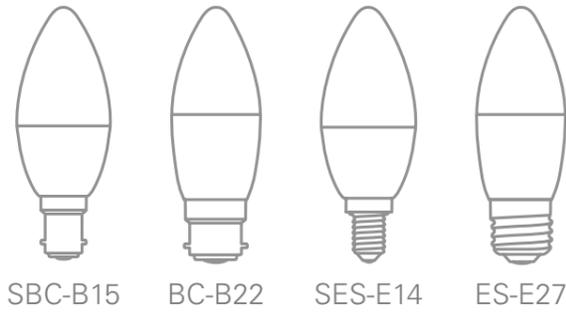

Bulb Life
10 years / 10,000 Hrs
Switching Cycles
>10,000 on/off cycles
Voltage
220-240V ~ 50/60Hz
Beam Angle
200°, 320°
Colour Render Index
>80
Mercury Free
100% Mercury free

Colour Temperature
2,700- 3,000 Kelvin
Colour Temperature
4,000 Kelvin
Colour Temperature
6,500 Kelvin




S Code	Wattage/Equiv	Lumen	Cap	Temp	Dimmable	CDU Qty	Finish	Energy Class
Box of 1								
S13612	4.9W/40W	470lm	B15	3000K	No	5	Opal	F
S14323	4.9W/40W	470lm	B15	4000K	No	5	Opal	F
S13613	4.9W/40W	470lm	B15	6500K	No	5	Opal	F
S13610	4.9W/40W	470lm	B22	3000K	No	5	Opal	F
S14322	4.9W/40W	470lm	B22	4000K	No	5	Opal	F
S13611	4.9W/40W	470lm	B22	6500K	No	5	Opal	F
S13616	4.9W/40W	470lm	E14	3000K	No	5	Opal	F
S14325	4.9W/40W	470lm	E14	4000K	No	5	Opal	F
S13617	4.9W/40W	470lm	E14	6500K	No	5	Opal	F
S13614	4.9W/40W	470lm	E27	3000K	No	5	Opal	F
S14324	4.9W/40W	470lm	E27	4000K	No	5	Opal	F
S13615	4.9W/40W	470lm	E27	6500K	No	5	Opal	F
S17381	7.3W/60W	806lm	B15	3000K	No	5	Opal	E
S17375	7.3W/60W	806lm	B22	3000K	No	5	Opal	E
S17378	7.3W/60W	806lm	B22	6500K	No	5	Opal	E
S17377	7.3W/60W	806lm	E14	3000K	No	5	Opal	E
S17380	7.3W/60W	806lm	E14	6500K	No	5	Opal	E
Box of 2								
S15334	4.9W/40W	470lm	B15	3000K	No	6	Opal	F
S15297	4.9W/40W	470lm	B22	3000K	No	6	Opal	F
S15298	4.9W/40W	470lm	B22	6500K	No	6	Opal	F
S15299	4.9W/40W	470lm	E14	3000K	No	6	Opal	F
S15300	4.9W/40W	470lm	E14	6500K	No	6	Opal	F
S15335	4.9W/40W	470lm	E27	3000K	No	6	Opal	F
Filament - Box of 1								
S15476	4W/40W	470lm	B15	2700K	No	5	Filament	E
S15475	4W/40W	470lm	B22	2700K	No	5	Filament	E
S15478	4W/40W	470lm	E14	2700K	No	5	Filament	E
S15477	4W/40W	470lm	E27	2700K	No	5	Filament	E
Filament - Box of 2								
S17395	4W/40W	470lm	B15	2700K	No	6	Filament	E
S17394	4W/40W	470lm	B22	2700K	No	6	Filament	E
S17397	4W/40W	470lm	E14	2700K	No	6	Filament	E
Flicker Flame - Box of 1								
S5959	3W	0.5lm	E14	1700K	No	10	Filament	G

S5959 - Not LED. **Bulb Life** 1 year / 1,000 Hrs, **Switching Cycles** >8,000 on/off cycles, **Beam Angle** 180°





GU10 Spotlight is designed to fit into downward lighting fixtures. With a wide beam angle the Eveready range of spotlight lamps delivers light when a soft focus is required.



Bulb Life
10 years / 10,000 Hrs

Switching Cycles
>10,000 on/off cycles

Voltage
220-240V ~ 50/60Hz

Beam Angle
110°

Colour Render Index
>80

Mercury Free
100% Mercury free

Colour Temperature
3,000 Kelvin

Colour Temperature
4,000 Kelvin

Colour Temperature
6,500 Kelvin




S Code	Wattage	Lumen	Cap	Temp	Beam Angle	Dimmable	CDU Qty	Finish	Energy Class
Box of 1									
S13598	3.1W/35W	230lm	GU10	3000K	110°	No	5	Opal	G
S14318	3.1W/35W	230lm	GU10	4000K	110°	No	5	Opal	G
S13599	3.1W/35W	230lm	GU10	6500K	110°	No	5	Opal	G
S13600	4.7W/50W	345lm	GU10	3000K	110°	No	5	Opal	G
S14319	4.7W/50W	345lm	GU10	4000K	110°	No	5	Opal	G
S13601	4.7W/50W	345lm	GU10	6500K	110°	No	5	Opal	G
Box of 2									
S15289	3.1W/35W	230lm	GU10	3000K	110°	No	6	Opal	G
S15291	4.7W/50W	345lm	GU10	3000K	110°	No	6	Opal	G
S15292	4.7W/50W	345lm	GU10	6500K	110°	No	6	Opal	G



LED REFLECTOR

Widely used in commercial and industrial applications, Reflectors come in either an Edison screw base (E27) or a Small Edison screw base (E14).

The number after the R denotes the light bulb's diameter in mm.

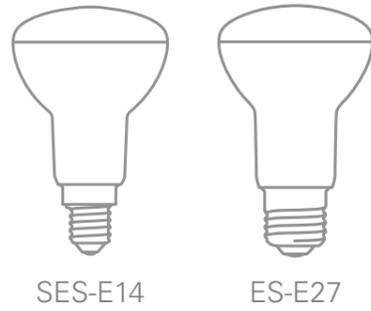

Bulb Life
10 years / 10,000 Hrs

Switching Cycles
>10,000 on/off cycles

Voltage
220-240V ~ 50/60Hz

Beam Angle
120°

Colour Render Index
>80

Mercury Free
100% Mercury free

Colour Temperature
3,000 Kelvin


S Code	Wattage/Equiv	Lumen	Cap	Temp	Dimmable	CDU Qty	Finish	Energy Class
R39 - Box of 1								
S13630	4.5W/30W	320lm	E14	3000K	No	5	Opal	G
R50 - Box of 1								
S13631	4.9W/40W	470lm	E14	3000K	No	5	Opal	F
R50 - Box of 2								
S15336	4.9W/40W	470lm	E14	3000K	No	6	Opal	F
R63 - Box of 1								
S13632	7W/50W	600lm	E27	3000K	No	5	Opal	F
R80 - Box of 1								
S13633	8.8W/60W	806lm	E27	3000K	No	5	Opal	F



APPLIANCE



Lamps for domestic appliances such as cookers, ovens and fridges including special bulbs used in some appliances like American fridge freezers. Eveready® has a range of incandescent lamps to suit your needs.

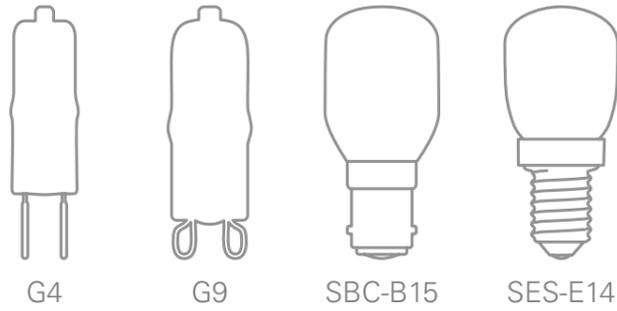

Bulb Life
1 / 2 years
1,000 / 2,000 Hrs

Switching Cycles
>8,000 on/off cycles

Voltage
12V / 220-240V ~
50/60Hz

Beam Angle
180°

Colour Render Index
>90 / 100

Mercury Free
100% Mercury free

Colour Temperature
2,800 - 3,000 Kelvin

Colour Temperature
4,000 Kelvin



S Code	Wattage	Lumen	Cap	Temp	Dimmable	CDU Qty	Finish	Energy Class
Oven Capsule - 300°C Heat Resistant - Box of 1								
S807	20W	240lm	G4	4000K	Yes	50	Clear	G
S814	25W	180lm	G9	4000K	Yes	10	Clear	G
S818	40W	320lm	G9	4000K	Yes	50	Clear	G
Oven Capsule - 300°C Heat Resistant - 2 Pack Blister								
S808	20W	200lm	G4	4000K	Yes	10	Clear	G
S815	25W	240lm	G9	4000K	Yes	10	Clear	G
S819	40W	320lm	G9	2800K	Yes	10	Clear	G
Oven Lamps - 300°C Heat Resistant - Box of 1								
S1020	15W	100lm	E14	2800K	Yes	10	Clear	G
S1022	25W	150lm	E14	2800K	Yes	10	Clear	G
S1024	40W	300lm	E14	3000K	Yes	10	Clear	G
Oven Lamps - 300°C Heat Resistant - 2 Pack Blister								
S1021	15W	100lm	E14	2800K	Yes	10	Clear	G
S1023	25W	150lm	E14	3000K	Yes	10	Clear	G
Fridge Lamps - Box of 1								
S872	15W	100lm	B15	3000K	Yes	10	Clear	G
S874	15W	100lm	E14	2800K	Yes	10	Clear	G
Fridge Lamps - 2 Pack Blister								
S875	15W	60lm	E14	3000K	Yes	10	Clear	G



PYGMY

Incandescent pygmy bulbs are compact, the perfect for display cabinets, side lamps, fridges, sewing machines and any other appliance that a small lamp is required. Available with B15, B22 & E14

S Code	Wattage	Lumen	Cap	Temp	Dimmable	CDU Qty	Finish	Energy Class
Box of 1								
S1053	15W	60lm	B22	2800K	Yes	10	Clear	G
S1057	15W	60lm	E14	2800K	Yes	10	Clear	G
S1055	15W	60lm	B15	3000K	Yes	10	Clear	G
S5956	15W	60lm	B22	1000K	Yes	10	Clear	G
S1063	25W	150lm	E14	2800K	Yes	10	Clear	G
2 Pack Blister								
S1056	15W	60lm	B15	3000K	Yes	10	Clear	G
S1054	15W	60lm	B22	3000K	Yes	10	Clear	G
S1058	15W	60lm	E14	3000K	Yes	10	Clear	G
S1064	25W	150lm	E14	3000K	Yes	10	Clear	G



SBC-B15



BC-B22



SES-E14

Bulb Life
1 year / 1,000 Hrs

Switching Cycles
>8,000 on/off cycles

Voltage
220-240V ~ 50/60Hz

Beam Angle
180°, 240°

Colour Render Index
>90

Mercury Free
100% Mercury free

Colour Temperature
1,000 Kelvin

Colour Temperature
2,800 Kelvin

Colour Temperature
3,000 Kelvin

SPECIALIST

EVEREADY®

S Code	Wattage	Lumen	Cap	Temp	Dimmable	CDU Qty	Finish	Energy Class
Heat lamp hard glass - Box of 1								
S5949	250W	1,300lm	E27	2350K	No	24	Diffused Hard Glass	G
S5951	250W	300lm	E27	1250K	No	24	Ruby Hard Glass	G
R39 Reflector Lava Lamp - Box of 1								
S1068	30W	180lm	E14	2700K	No	10	Diffused Hard Glass	G
Nightlight - 2 Pack Blister								
S1066	7W	50lm	E12	2200K	No	20	Clear	G
S1067	7W	50lm	E14	2200K	No	20	Clear	G
Fireglow - Box of 1								
S854	40W	390lm	B22	-	No	10	Ruby Glass	G
S855	60W	710lm	B22	-	No	10	Ruby Glass	G



BC-B22



CES-E12



SES-E14



ES-E27

Bulb Life
1 / 1.5 / 5 Years
1,000 / 1,500 / 5,000 Hrs

Switching Cycles
>4,000 / 8,000 / 50,000 on/off cycles

Voltage
220-240V ~ 50/60Hz

Beam Angle
180°

Colour Render Index
>90 / 100

Mercury Free
100% Mercury free

Colour Temperature
1,250 Kelvin

Colour Temperature
2,200- 2,350 Kelvin

Colour Temperature
2,700 Kelvin



LINEAR

S Code	Size	Wattage	Lumen	Cap	Kelvin	Dimmable	CDU Qty	Energy Class
Box of 1								
S10112	78 x 8mm	120W	2,250lm	R7S	2900K	Yes	50	G
S10113	118 x 8mm	120W	2,250lm	R7S	2900K	Yes	10	G



R&s

Bulb Life
10 years / 10,000 Hrs

Switching Cycles
>8,000 on/off cycles

Voltage
220-240V ~ 50/60Hz

Beam Angle
300°

Colour Render Index
>80

Mercury Level
≤3.5mg

Colour Temperature
2,900 Kelvin




FLOODLIGHTS

EVEREADY®

S Code	Wattage	Lumen	Size (mm)	Temp	Dimmable	Energy Class
IP44 PIR Sensor						
S13948	10W	1000lm	127(w) x 145(h) x 71(d)	4000K	No	F
S13949	20W	2000lm	127(w) x 145(h) x 71(d)	4000K	No	F
S13950	30W	3000lm	164(w) x 167(h) x 79(d)	4000K	No	F
S13951	50W	5000lm	183(w) x 198(h) x 79(d)	4000K	No	F
IP65						
S13944	10W	1000lm	84(w) x 69(h) x 21(d)	4000K	No	F
S13945	20W	2000lm	108(w) x 88(h) x 28(d)	4000K	No	F
S13946	30W	3000lm	143(w) x 110(h) x 29(d)	4000K	No	F
S13947	50W	5000lm	164(w) x 141(h) x 29(d)	4000K	No	F
S16825	100W	10000lm	230(w) x 185(h) x 33(d)	4000K	No	F



IP65



IP44 PIR

Bulb Life
25 years / 25,000 Hrs

Lumens per Watt
100lm/W


Voltage
220-240V ~ 50Hz

Beam Angle
110°

Displacement Factor
≥0.5, ≥0.9

Lead Cable
100cm

Colour Temperature
4,000 Kelvin



LED 30,000hr Floodlights



Outdoor areas often require instant light to dark areas such as driveways and gardens, providing much needed visibility for safety and security.

- 30,000 hour life
- 25,500 switching cycles
- 120 Lumens per Watt
- 120° Beam Angle
- Colour rendering index ≥80
- 100cm Lead Cable
- 3 Colour temps; 6,500K
- 2 Options; IP65 and IP44 PIR Sensor
- 5 Year Warranty

Energizer®



S Code	Wattage	Lumen	Size (mm)	Temp	Dimmable	Energy Class
IP44 PIR Sensor						
S10928	10W	1200lm	170(w) x 198(h) x 88(d)	6500K	No	E
S10930	20W	2400lm	150(w) x 170(h) x 88(d)	6500K	No	E
S10932	30W	3600lm	184(w) x 193(h) x 88(d)	6500K	No	E
S10934	50W	6000lm	214(w) x 216(h) x 95(d)	6500K	No	E
IP65						
S10927	10W	1200lm	127(w) x 104(h) x 52(d)	6500K	No	E
S10929	20W	2400lm	151(w) x 137(h) x 52(d)	6500K	No	E
S10931	30W	3600lm	184(w) x 162(h) x 58(d)	6500K	No	E
S10933	50W	6000lm	219(w) x 210(h) x 58(d)	6500K	No	E



LED HAND-HELD RANGE



Bright. Versatile. Indispensable. Energizer brings bold, innovative flashlight technology to virtually any situation, indoors or out. For simple household use or serious storm preparation, the standard flashlight has come a long way.



S-Code	Title	Lumens*	Run Time (hrs)**	Beam Length (m)	Ingress Protection	CDU Qty	Batteries included
EMERGENCY							
S8930	Waterproof LED Torch	35lm	35	50	IPX7	12	2 x AA
S18845	X Focus LED	50lm	45	45	IPX4	12	2 x AA
S8934	Value Metal 2D Torch	135lm	51	72	-	4	2 x D
S14675	TAC700 Durable Professional Torch	700lm	35	100	IPX4	4	2 x CR123
S29850	Hybrid Tactical Light Aircraft Grade Aluminum LED Light	1200lm	4	200	IPX4	4	6 x AA
S12118	LED Vision HD Metal Torch	1500lm	19	115	IPX4	4	6 x AA
S18851	Tactical TAC Rechargeable Torch	1200lm	15	200	IPX4	4	USB Rechargeable
EVERYDAY							
S14670	LED Keychain Touch Tech Torch	20lm	5	10	-	12	2 x CR2032
S8939	Low Cost LED Torch	25lm	120	35	-	9	Batteries not included
S8940	LED Torch Light	25lm	50	35	-	12	Batteries not included
S4786	Pocket LED Torch	45lm	19	44	-	6	2 x AAA
S5515	Magnetic Torch	50lm	50	50	-	6	2 x AA
S6669	Small Value Metal Torch	50lm	15	30	-	12	3 x AAA
S8933	Metal LED Torch	60lm	22	36	-	8	2 x AA
S12116	LED Vision HD Metal Torch	250lm	11	83	IPX4	6	3 x AAA
OUTDOOR / SPORT							
S12117	LED Vision HD Metal Torch	300lm	15	115	IPX4	4	2 x AA
PROJECT / WORK							
S3819	Metal Penlite Torch	35lm	20	9	-	8	2 x AAA
S14676	Hardcase Multiuse Compact Mini Light	75lm	6	30	IPX4	4	1 x AA
S5507	LED Impact Torch	100lm	18	50	IPX4	12	2 x AAA
S5506	LED Impact Rubber Torch	125lm	30	65	-	4	2 x AA
S14081	LED Hardcase Pivot Plus Torch	300lm	300	6.5	115	4	2 x AA
S14082	LED Hardcase Project Plus Torch	400lm	50	125	IPX4	4	4 x AA
S14989	Hardcase Pro Worklight	550lm	40	-	IPX4	4	4 x AA

*Based on High Lumen Mode **Based on Low Lumen Mode



LED HANDS-FREE RANGE



The ideal hands-free torch solution, headlights are convenient, versatile and have a wide range of safety benefits.

Our head torches come in various sizes and designs to suit different needs and preferences. Some models offer adjustable brightness settings, multiple lighting modes (such as floodlight and spotlight), and tiltable lamp heads, providing versatility for different activities and lighting requirements.



S-Code	Title	Lumen*	Run Time (hrs)**	Beam Length (m)	Ingress Protection	CDU Qty	Batteries included
EVERYDAY							
S9177	Vision Headlight Torch	200lm	50	30	-	6	3 x AAA
S18556	Rechargeable Multiuse Headlamp	180lm	3	17	IPX4	4	USB Rechargeable
S5248	LED Booklite Torch	11lm	25	4	-	12	2 x CR2032
OUTDOOR / SPORT							
S16518	LED Wearable Clip Light / Torch	30lm	3.15	-	IPX4	12	2 x CR2032
S18564	Rechargeable Multiuse Headlamp	200lm	10	60	IPX4	4	USB Rechargeable
S29852	HDL10 LED Headlamp Adjustable Headtorch With Shatterproof Lens	250lm	40	60	IPX4	4	3 x AAA
S29860	Hybrid-Powered Multi-Colored Head	300lm	6	115	IP67	4	4 x AAA
S9178	Vision HD Headlight	300lm	52	40	IPX4	6	3 x AAA
S29853	HDL20 Headlamp	325lm	40	70	IPX4	4	3 x AAA
S29854	HDL30 Headlamp	400lm	40	80	IPX4	4	3 x AAA
S9180	Vision HD+ Focus Headlight	400lm	50	80	IPX4	6	3 x AAA
S14671	LED Vision Ultra HD Headlight	450lm	50	80	IPX4	6	3 x AAA
S29856	HDL50 LED Headlamp	500lm	2	75	IP67	4	3 x AAA
S29855	HDL40 Headlamp	500lm	45	45	IPX4	4	3 x AAA
S29857	HDL60 Hybrid Headlamp	575lm	2	75	IPX7	4	3 x AAA
PROJECT / WORK							
S5593	Atex LED Headlight	130lm	6	45	IPX7	4	Batteries not included
S14083	Hardcase LED Headlight	325lm	22	100	IPX4	6	3 x AA
S9179	Vision HD+ Headlight	350lm	50	70	IPX4	6	3 x AAA
S14672	Vision Ultra Rechargeable Headlamp	400lm	15	80	IPX4	4	USB Rechargeable

*Based on High Lumen Mode **Based on Low Lumen Mode



LED LANTERN RANGE



- Durable construction with rubberised non-slip handle and base.
- Multiple Modes to support different requirements, (including nightlight).
- 1250 Lumens with wide area coverage.
- Built to last:
1m Drop Resistant
IPX4 – Water Resistant
- Dimmable option for extra versatility.
- Hybrid Powered: Rechargeable via USB or 4AAs. USB port out: charges other devices.




S-Code	Title	Lumen*	Run Time (hrs)**	Beam Length (m)	Ingress Protection	CDU Qty	Batteries included
S8935	Lantern 2/4D	80lm	160	100	-	4	Batteries not included
S14673	Camping Lantern + Powerbank	1000lm	170	-	-	2	USB Recharge + 4 x D
S29851	Vision Hybrid Powered Rechargeable Lantern	1250lm	6	-	-	2	USB Recharge + 4 x AA

*Based on High Lumen Mode **Based on Low Lumen Mode

Display Solutions

- Pop Up FSDU
- Flat Packed
- Magnetic Fastens
- Simple Assembly
- Flat to Standing in Under 10 Seconds

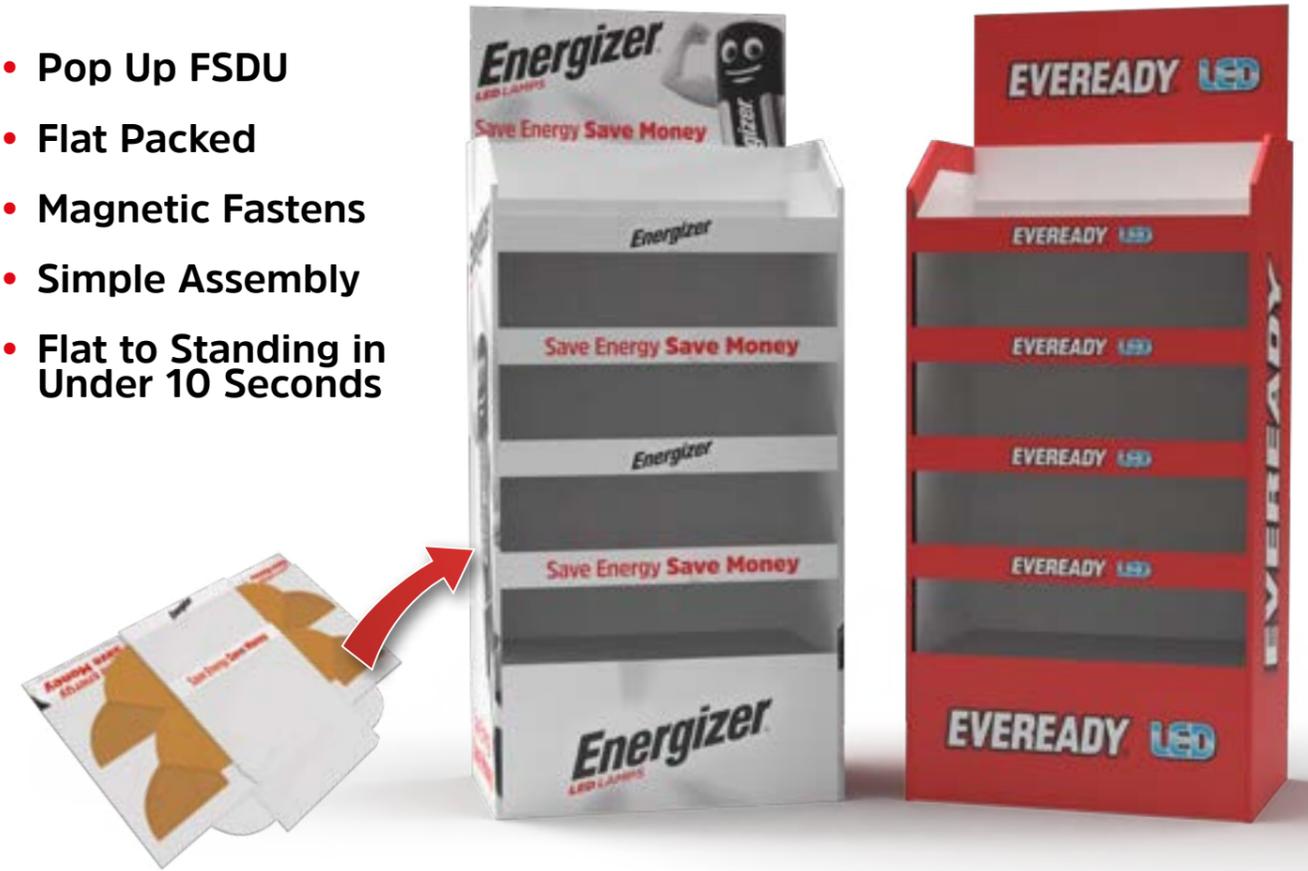

- Metal Hanging Display
- Attach to Existing Slatted Wall
- Clean Hanging Solution
- Slim Elegant Design

S-Code	Title
S19099	Energizer Pop Up FSDU
S29930	Eveready Pop Up FSDU
S29908	Energizer peg board

All display solutions are the unit only and are Unfilled

01-03 LED Commercial Floodlights

LUMILIFE

- Lumens per Watt: 120 lm/W
- CRI: > 80
- Beam Angle: 110°
- IP Rating: IP65
- PF = 0.9
- Die-Cast Aluminium Body
- Glass Diffuser
- Lead Cable: 50cm
- Lamp Life: 50,000 Hrs



01	S18411	100W Flood 5,000K
02	S18412	150W Flood 5,000K
03	S18413	200W Flood 5,000K

04-06 LED Essential UFO Highbay - 170 Lm/W

LUMILIFE

- IP Rating: IP65
- Lumens per Watt: 170 lm/W
- Wattage Adjustable
- Beam Angle: 120°
- Colour Temp: 5,700K
- Built in Potentiometer to Control Power (Wattage 60W, 80W, 100W) and Lumens
- Impact Rating: IK08
- Dimmable
- Operating Temp: -30°C to 50°C
- Lamp Life: 50,000 Hrs
- Glass Lens



04	S16281	Essential 170 lm/W 100W Adj Power - 5,700K
05	S16282	Essential 170 lm/W 150W Adj Power - 5,700K
06	S16283	Essential 170 lm/W 200W Adj Power - 5,700K

07-09 Essential Highbay Reflectors

LUMILIFE

- Lightweight Polycarbonate Finish
- Beam Angle: 70°

07	S15649	70 Degree PC Clear Reflector
----	---------------	------------------------------

- Aluminium Finish
- Beam Angle: 60° / 70° / 90°

08	S15647	60 Degree Aluminium Reflector
09	S15648	90 Degree Aluminium Reflector



10 Essential Adjustable Installation Bracket

LUMILIFE

- Black finish
- Compatible with LED Highbay
- Adjustable Bracket
- Flange Mount Bracket
- Dimensions (mm): 245(l) x 125(h) x 80(d)



10	S16203	Adjustable Installation Bracket - Essentials
----	---------------	--

11-12 Highbay Microwave Sensor / Remote

LUMILIFE

- Compatible With LED Highbay
- Junction Box Included
- Adjustable Daylight Sensor
- Dimensions (mm): 180(w) x 59(h) x 12(d)

11	S15657	Merrytek Highbay Micro & Daylight Sensor
----	---------------	--



Dimensions (mm): 55(w) x 15(h) x 115(d)
Motion Detection: 16m

12	S15679	Merrytek Sensor Remote Control
----	---------------	--------------------------------

13 Highbay Emergency inc Battery - 30W

LUMILIFE

- IP Rating: IP65
- Lumens per Watt: 170 lm/W
- Beam Angle: 120°
- Colour Temp: 4,000K & 5,700K
- Operating Temperature: -30°C to 50°C
- Impact Rating: IK08
- Dimmable Driver
- Variable Wattage 80W, 120W, 150W (default)
- PC Lens
- 3 Hour emergency time.
- Voltage: 100-240V / 50~60Hz
- Self testing
- CE, RoHS approved
- Lamp Life: 50,000 Hrs
- 2 year warranty on Battery



13	S18773	Highbay Emergency inc Battery
----	---------------	-------------------------------



14-15 LED Mountain UFO Highbay - 170 Lm/W

LUMILiFe

- IP Rating: IP65
- Lumens per Watt: 170 lm/W
- Beam Angle: 110°
- Colour Temp: 4,000K & 5,700K
- Operating Temperature: -30°C to 50°C
- Impact Rating: IK08
- Dimmable Driver
- Variable Wattage 80W, 120W, 150W (default)
- Lamp Life: 50,000 Hrs
- PC Lens
- Plug and Play Microwave Sensor Available - S18763



14	S18758	Mountain UFO Highbay - 170 Lm/W 4,000K
15	S18761	Mountain UFO Highbay - 170 Lm/W 5,700K

16-17 Merrytek Motion Sensor

LUMILiFe

- Remote Control Functionality
- Angle: 360°
- Installation height: 6 to 8m
- Working Temp: -30 to 80°C
- Detection Range: 25, 50, 75 & 100%
- Hold Time: 10 Sec to 30 Min
- Daylight Sensor: Off, 10, 30 & 100 Lux
- Anti-interference
- Wide coverage
- Signal programmable



16	S18763	Plug and Play Microwave Sensor
17	S18764	Mountain Highbay Controller

18-19 Mountain Highbay Reflectors

LUMILiFe

- Easy to fit
- Aluminium Finish
- Beam Angle: 60° / 90°



18	S18766	170 lm UFO HB Alum Ref 90 Deg 150W
----	---------------	------------------------------------

- Easy to fit
- Lightweight Polycarbonate
- Beam Angle: 70°

19	S18771	170Lm/W UFO HB PC Reflector 150W
----	---------------	----------------------------------

20 LED Twin spot - 3Hr Emergency - IP65 - Self Test

LUMILiFe

- IP Rating: IP65 self-contained emergency twin spot
- Impact Rating: IK10
- Low stand-by power consumption < 0.5W
- Self-test version available
- Li-on battery with 5-year warranty
- Non-maintained 350lm in emergency mode
- Suitable for indoor or outdoor applications
- Remote control optional



20	S16030	LED 2 X 3W Twin-Spot IP65 Non-Maintained
----	---------------	--

21 LED IP65 CCT Wall Pack - 30W

LUMILiFe

- Wattage: 30W
- Lumens: Up to 2,700 lm
- Lumens per Watt: 90 lm/W
- Colour Temp: 3,000K / 4,000K / 6,000K
- IP Rating: IP65
- Power: 220-240V AC
- CRI >80
- Working Temp: -20°C to 40°C
- Quick Fit Push Terminal
- Dimensions (mm): 264(w) x 309(h) x 117(d)



21	S18530	30W Wall Pack CCT
----	---------------	-------------------

22-24 LED Bulkheads

Energizer

- UV Stabilised PP
- Anti-Corrosive
- Wattage: 14W
- Lumens: 1200lm
- Indoor or Outdoor Use
- Colour Temp: 4,000K
- Beam Angle: 110°
- IP Rating: IP54
- 220-240V / 50Hz
- Power Factor: 0.5



22	S10444	LED Oval Bulkhead
23	S10445	LED Round Bulkhead

- PIR Range: 8m
- PIR Angle: 120°
- Time on Period: 3 Mins

24	S12972	LED Oval PIR Bulkhead
----	---------------	-----------------------

All measurements are approximate

25 LED Slimline Bulkhead



- White PC Base
- Opal PC Diffuser
- Push Fit Terminal
- Wattage: 18W
Lumens: 1,800lm
- Indoor or Outdoor Use
- Colour Temp: 4,000K
- Beam Angle: 180°
- IP Rating: IP65
- 220-240V / 50Hz
- Power Factor: 0.5



Energy Star F A T G

White IP Rated 65 Up to 25,000 hrs CRI >80

25 S11568 LED Slimline Bulkhead

26 LED 300mm Indoor/Outdoor CCT Chrome Light



- Removeable Chrome Trim
- Opal PS Diffuser
- Push Fit Terminal
- Wattage: 15W
Lumens: 1,200lm (@ 4,000 Kelvin)
- Colour Temp: CCT - 3,000K / 4,000K / 6,500K
- Beam Angle: 120°
- IP Rating: IP44
- 220-240V / 50Hz
- Power Factor: 0.9



Energy Star F A T G

White IP Rated 44 Up to 25,000 hrs CRI >80

26 S11963 LED 300mm CCT Chrome Light

27 LED 300mm IP44 Microwave Ceiling Light



- Removeable White Trim
- Opal PS Diffuser
- Push Fit Terminal
- Wattage: 15W
Lumens: 1,200lm (1,000lm with Trim)
- Colour Temp: 4,000K
- Beam Angle: 120° (110° with Trim)
- Lux Control: <50 Lux or Disabled
- Sensor Range: Up to 14m
- Sensor Sensitivity: 100%, 75%, 50% or 10%
- Hold-on Time: 5 Sec, 90 Sec, 5 Mins or 15 Mins
- PIR Time On: up to 4 Minutes
- IP Rating: IP44
- 220-240V / 50Hz
- Power Factor: 0.5



Energy Star E A T G

White IP Rated 44 Up to 25,000 hrs CRI >80

27 S13025 LED 300mm IP44 Microwave Ceiling Light - 4,000K

28-29 LED 250mm Indoor/Outdoor IP44 Light



- Removable Silver Trim
- Opal PS Diffuser
- Push Fit Terminal
- Wattage: 12W
Lumens: 700lm
- Colour Temp: 3,000K / 4,000K
- Beam Angle: 120°
- IP Rating: IP44
- 220-240V / 50Hz
- Power Factor: 0.7



Energy Star F A T G

White IP Rated 44 Up to 25,000 hrs CRI >80

28 S10065 LED 250mm IP44 Light - 3,000K

29 S12514 LED 250mm IP44 Light - 4,000K

30 LED 300mm Indoor/Outdoor IP44 Square Light



- Push Fit Terminal
- Wattage: 16W
Lumens: 1,200lm
- Colour Temp: 4,000K
- Beam Angle: 120°
- IP Rating: IP44
- 220-240V / 50Hz
- Power Factor: 0.9



Energy Star F A T G

White IP Rated 44 Up to 25,000 hrs CRI >80

30 S12932 LED 300m IP44 Square Light - 4,000K

31 Multi-Use GU10 Spotlight



- Non Corrosive
- Plastic Construction
- UV Resistant
- Ideal for Outdoors & Coastal Areas
- Pre Wired for Quick & Simple Installation
- Hard Surface Base or Spike Mounting Options
- Cable Length: 500mm
- 220-240V / 50Hz



31 S14341 Multi-Use GU10 Spotlight

32-35 LED Polo Fittings CCT - Dual Wattage

LUMILife

- ABS Base
- Polycarbonate Diffuser
- Indoor or Outdoor Use
- Colour Temp: 3,000K / 4,000K / 6,500K
- Beam Angle: 115°
- Lumens: 1200lm - 1600lm
- IP Rating: IP65
- 220-240V
- Microwave sensitivity: 50% / 100%



32	S18432	LED Polo CCT Fitting 12/16W - CCT
33	S18434	LED Polo CCT Fitting 13.5/17.5W - Emergency
34	S18436	LED Polo CCT Fitting 12/16W - Microwave Corridor
35	S18437	Polo CCT 13.5/17.5W - Corridor, Micro, Emergency



36-42 LED Gear Trays CCT - 8W - 17.5W

LUMILife

- Working Temp: -10° to +40°C
- Lumens Per Watt: 101-135 lm/W
- Colour Temp: 3,000K / 4,000K / 6,500K
- Isolated driver
- Flicker Free
- CRI: >80
- PF: >0.9
- 220-240V AC / 50Hz
- Beam Angle: 120°
- Terminal: Quick Fit
- Push Terminal: 3-Way / 4-Way
- Aluminium PCB Board

Available Function

- Microwave Sensitivity: 25/50/75/100%

Emergency Features

- Emergency Lumens: 100lm
- Battery: LiPo4 3.2V 1,500mAh
- Period: 3 Hours

Tray Dimensions:

- 8/9.5W: Ø 190mm x 30mm
- 16/17.5W: Ø 243mm x 30mm

36	S17320	8W LED Gear Tray CCT
37	S17321	9.5W LED Emer Gear Tray CCT
38	S17314	16W LED Gear Tray - CCT
39	S17316	16W LED Micro Gear Tray CCT
40	S17315	17.5W LED Emer Gear Tray CCT
41	S17317	17.5W LED Emer & Micro Gear Tray CCT
42	S17318	17.5W LED Emer, Micro & Dim Gear Tray CCT



43-46 Gear Trays Bodies - 8W/17.5W

LUMILife

- ABS Base
- Polycarbonate Diffuser
- IP Rating: IP65

43	S17322	Bulkhead Body - 270mm
44	S17319	Bulkhead Body - 320mm

- ABS Base
- Polycarbonate Diffuser
- IP Rating: IP65

45	S18865	Tamper Proof Bulkhead Body - 200mm
46	S18866	Tamper Proof Bulkhead Body - 305mm



47 LED 600 x 600 3D Cloud Sky Panel - 40W

LUMILife

- Thickness: 12mm
- White Trim
- Wattage: 40W
- Lumens: 1,500 lm
- CRI: >80
- IP Rating: IP20
- Flicker Free
- Remote Driver
- 220~240V / 50~60Hz
- Non-Dimmable
- Power Factor: 0.9
- Dimmable / Dali Options Available
- Internal dimensions 595 x 595mm



47	S14971	LED 600 x 600 3D Cloud Sky Panel - 40W
----	--------	--



48-50 LED 600 x 600 TPa Backlit Panels - 36W

LUMILife

- TP(a) Flame Rated
- UGR<19
- Thickness 35mm
- Lamp Life: 50,000 Hrs
- Wattage: 36W
- Lumens: 3,600lm
- Lumens Per Watt: 100 lm/W
- CRI: >80
- IP Rating: IP20
- Flicker Free
- Power Factor: 0.9
- Beam Angle: 90°
- Non-Flicker LED Driver with Quick Connector
- White (RAL 9016) Aluminium Frame
- Dimmable / Dali Options Available
- 5 Year Warranty

48	S16731	LED 600 x 600 Backlit Panel TPa - 4,000K
49	S16732	LED 600 x 600 Backlit Panel TPa - 5,000K
50	S16733	LED 600 x 600 Backlit Panel TPa - 6,500K



51 LED 600 x 600 TPa Backlit Panels - 36W

LUMILife

- UGR<22
- Thickness 31mm
- Lifespan: 50,000 Hours
- Wattage: 36W
- Lumens: 3,820 lm
- Lumens Per Watt: 106 lm/W
- CRI: >80
- IP Rating: IP20
- Flicker Free
- Power Factor: 0.9
- Beam Angle: 120°
- Dimmable / Dali Options Available
- 5 Year Warranty

51	S18701	LED 600 x 600 Backlit Panel - 4,000K
----	--------	--------------------------------------



All measurements are approximate

52-55 LED TPa Backlit CCT Adjustable Panels

LUMILife

- Backlit
- TP(a) Flame Rated
- Lumens Per Watt: 100 lm/W
- Colour Temp: 3,000K / 4,000K / 6,500K
- UGR <19
- Lamp Life: 50,000 Hrs
- Non-Flicker Driver
- 5 Year Warranty



52	S16292	300 x 300 Backlit Panel - CCT 18W
53	S16291	300 x 600 Backlit Panel - CCT 20W
54	S16288	300 x 1200 Backlit Panel - CCT 36W
55	S16287	600 x 1200 Backlit Panel - CCT 60W

56 LED Sidelit Panels - 40W

LUMILife

- Replaces T8 & T5 Fluorescent
- Up To 50,000 Hours Life Expectancy
- LiFud Driver (Non-Flicker)
- White (RAL 9016) Aluminium Frame
- LIA Laboratories / TP(b) Flame Rated Report
- Dimmable / Dali Options Available
- 5 Year Warranty



56	S16359	600 x 600 Sidelit Panel - 4,000K 40W
----	--------	--------------------------------------

57-61 LED Panel Surface Mount Frames

LUMILife

- White Powder Coated Finish
- Self-Assemble
- Easy Installation



57	S15662	300 x 300 Sidelit and Backlit Panel Frame
58	S15660	300 x 600 Sidelit and Backlit Panel Frame
59	S15661	300 x 1200 Sidelit and Backlit Panel Frame
60	S18416	600 x 600 Sidelit and Backlit Panel Frame
61	S15659	600 x 1200 Sidelit and Backlit Panel Frame

62 LED Panel - Suspension Kit

LUMILife

- Compatible with LED Panels:
300x300 / 300x600 / 300x1,200 / 600 x 600 / 600 x 1,200
- Adjustable Length
- 4 Clips



62	S15671	LED Panel - Suspension Kit
----	--------	----------------------------

63-65 Emergency Packs

LUMILife

- 3 Hours Emergency support
- Easy Installation
- Re-chargeable Battery
- For use with LED Lighting
- S18428 plug and play attachment for use with LED Panels



63	S18428	Panel Emergency kit
64	S15595	Universal Panel Emergency Kit
65	S15608	B1 Emergency Pack for Downlights

66 Non Dimmable Drivers

LUMILife

- Power Factor: >0.95
- Average Life: 30,000hr
- Min. and Max. Ambient Temp: -20°C to +45°C
- Isolated Circuit
- Not Dimmable
- Flicker-Free
- Suitable for Luminaire: Class II
- IP Rating: IP20



66	S17438	Non Dimmable Driver - 40W
----	--------	---------------------------



All measurements are approximate

67-68 Dimmable Triac / Dali Drivers

LUMILIFE

- Power Factor: >0.95
- Isolated Circuit
- Dimmable DALI & Triac
- Dimming Range: 1% / 100%
- Flicker-Free
- Suitable for Luminaire: Class I and Class II
- IP Rating: IP20



67	S17440	Dimmable Triac Driver - 45W
68	S17441	Dali Driver - 42W



69-72 LED Circular Panel Recessed CCT: 6W - 24W

LUMILIFE

- Wattages: 6W/12W/18W/24W
- Power Factor: >0.5 / >0.9
- Lumens Per Watt: 70 lm/W
- Colour Temp: Adjustable (3,000K / 4,000K / 6,500K)
- Beam Angle: 120°
- 240V AC
- CRI: >80
- Class II
- Emergency Options Available



69	S18478	Circular Panel Recessed CCT - 6W
70	S18479	Circular Panel Recessed CCT - 12W
71	S18480	Circular Panel Recessed CCT - 18W
72	S18481	Circular Panel Recessed CCT - 24W



73 LED Downlight CCT - IP54 - 10W

LUMILIFE

- White Bezel
- Dimmable
- Beam Angle: 90°
- Up To 40,000 Hours Life Expectancy
- IP Rating: IP54
- 90-95mm Cut-Out Size Required
- Emergency Options Available




73	S16307	LED Downlight - IP54 CCT - 10W
----	---------------	--------------------------------



74-81 LED IP20 Screwless Hinged Battens: 10W - 65W

LUMILIFE

- White Steel Housing
- Screwless Hinged Bracket
- Quick Fit Push Terminals
- Lumens per Watt: 130 lm/W
- Colour Temperature: 4,000K
- Opal PC Diffuser
- IP Rating: IP20
- Impact Rating: IK06
- Flicker Free

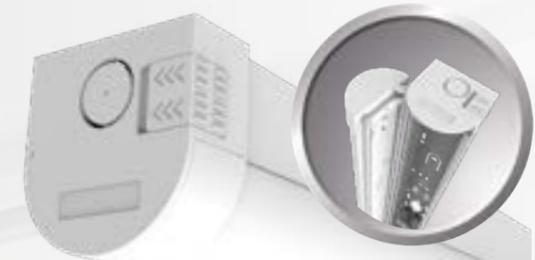


74	S18590	LED 2ft IP20 Screwless Batten - 10W Single
75	S15400	LED 4ft IP20 Screwless Batten - 20W Single
76	S15404	LED 5ft IP20 Screwless Batten - 30W Single
77	S15408	LED 6ft IP20 Screwless Batten - 40W Single
78	S18591	LED 2ft IP20 Screwless Batten - 20W Twin
79	S15401	LED 4ft IP20 Screwless Batten - 40W Twin
80	S15405	LED 5ft IP20 Screwless Batten - 60W Twin
81	S15409	LED 6ft IP20 Screwless Batten - 65W Twin



82-87 LED IP20 Screwless Hinged Battens - Emergency - 20W-65W

LUMILIFE

- White Steel Housing
- Opal PC Diffuser
- Lumens per Watt: 130 lm/W
- Colour Temperature: 4,000K
- IP Rating: IP20
- Impact Rating: IK06
- Flicker Free
- Screwless Hinged Bracket
- Quick Fit Push Terminals
- Emergency: 1.5W-2W Power
- 3 Hour Duration
- 2 Year Warranty on Battery

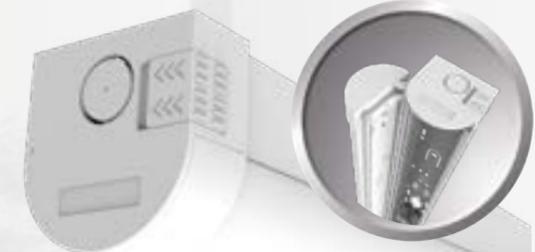


82	S15402	LED 4ft IP20 Screwless Batten - 20W Single Em
83	S15406	LED 5ft IP20 Screwless Batten - 30W Single Em
84	S15410	LED 6ft IP20 Screwless Batten - 40W Single Em
85	S15403	LED 4ft IP20 Screwless Batten - 40W Twin Em
86	S15407	LED 5ft IP20 Screwless Batten - 60W Twin Em
87	S15411	LED 6ft IP20 Screwless Batten - 65W Twin Em



88 LED IP20 Screwless Hinged Battens - Sensor - 30W

LUMILIFE

- White Steel Housing
- Opal PC Diffuser
- Lumens per Watt: 130 lm/W
- Colour Temperature: 4,000K
- IP Rating: IP20
- Impact Rating: IK06
- Flicker Free
- Integrated Sensor
- Screwless Hinged Bracket
- Quick Fit Push Terminals

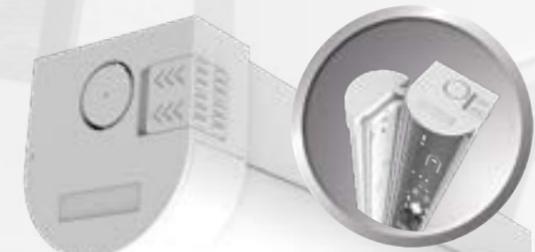

88	S18568	LED 5ft IP20 Sensor Batten Single - 30W
----	---------------	---



All measurements are approximate

DOWNLIGHT / PANELS DRIVERS

LED BATTENS

- White Steel Housing
- Opal PC Diffuser
- Lumens per Watt: 130 lm/W
- Colour Temp: Adjustable (3,000K / 4,000K / 6,500K)
- IP Rating: IP20
- Impact Rating: IK06
- Flicker Free
- Screwless Hinged Bracket
- Quick Fit Push Terminals



89 S18427 LED 5ft IP20 CCT Adj Batten Single - 30W

90-92 LED Plug 'n' Play CCT & Power Adjustable LED Batten


- Wattage Adjustable: See Table Below
- Lumens per Watt: 150 lm/W
- Colour Temp: Adjustable (4,000K / 5,000K / 6,500K)
- Beam Angle: 120°
- Material: White Steel Housing - PC End-Cap - PC Diffuser - Fiber PCB Heat Sink
- Quick Fit Push Terminals
- Indoor Use Only



90	S30132	LED P'n'P Batten 4ft / 120cm	Wattage: 20 / 26 / 30 / 37W
91	S30133	LED P'n'P Batten 5ft / 150cm	Wattage: 30 / 35 / 42 / 54W
92	S30134	LED P'n'P Batten 6ft / 180cm	Wattage: 35 / 42 / 50 / 62W

93-94 Plug 'n' Play Additional Packs

- Detection: 100%/75%/50%/25%
- Hold time: 5S / 30S / 1min / 3min / 5min / 10min / 20min / 30min
- Detection radius: (mounted location)(Ceiling 3m(h)) : 0.3m/S ≥ 3.5m, 1m/S ≥ 2.5m(Wall 2m(h)) : 0.3m/S ≥ 8m, 1m/S ≥ 4m
- Override function
- Input: 220-240Vac 50/60Hz (15mA max)
- Output: 30-300Vdc (8-65mA) 3W
- 3hrs Duration With LiFePo4 Battery Packs 3.6Ah 3.2V || .52Wh
- 2 Warranty on Battery

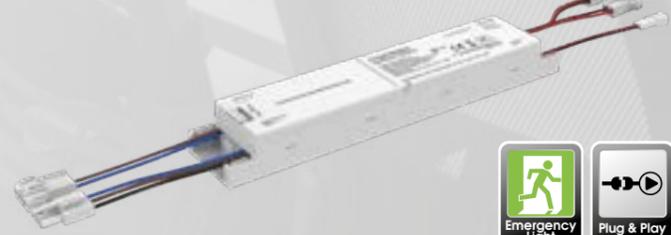

93 S30135 Plug 'n' Play Microwave Sensor

94 S30136 Plug 'n' Play Emergency Pack

- Weatherproof
- PC Frosted Diffuser PC Base Stainless Steel Clips
- Lumens per Watt: 120 lm/W
- Colour Temp: 4,000K / 6,5000K
- Screwless Hinged Bracket
- Quick Fit Push Terminals
- Beam Angle: 120°
- IP Rating: IP65
- Indoor or Outdoor Use
- 220-240V / 50Hz
- Power Factor: 0.9



95	S29690	4ft NCF IP65 LED 4800lm (40W) Batten - 4,000K
96	S29692	5ft NCF IP65 LED 2800lm (23W) Batten - 4,000K
97	S29695	5ft NCF IP65 LED 5800lm (48W) Batten - 4,000K
98	S29699	5ft NCF IP65 LED 5800lm (48W) Batten - 6,500K
99	S29696	6ft NCF IP65 LED 3200lm (27W) Batten - 4,000K
100	S29698	6ft NCF IP65 LED 6600lm (55W) Batten - 4,000K

101 NCF Batten Microwave Sensor

- Weatherproof
- PC Frosted Diffuser PC Base Stainless Steel Clips
- Lumens per Watt: 120 lm/W
- Colour Temp: 4,000K
- Screwless Hinged Bracket
- Quick Fit Push Terminals
- Beam Angle: 120°
- Sensor Angle: 100°
- Sensor Range: up to 8m
- Sensor Operation: up to 30 Minutes
- IP Rating: IP65
- Indoor or Outdoor Use
- 220-240V / 50Hz
- Power Factor: 0.9



101 S29693 5ft NCF IP65 LED 2800lm (23W) Batten - 4,000K

102-106 NCF Battens Emergency

- Weatherproof
- PC Frosted Diffuser PC Base Stainless Steel Clips
- Lumens per Watt: 120 lm/W
- Colour Temp: 4,000K / 6,5000K
- 3h Emergency Battery Power Backup
- Screwless Hinged Bracket
- Quick Fit Push Terminals
- Beam Angle: 120°
- IP Rating: IP65
- Indoor or Outdoor Use
- 220-240V / 50Hz
- Power Factor: 0.9
- 2 Warranty on Battery



102	S30127	2ft NCF IP65 LED 2200lm (20W) Batten - 4,000K
103	S29691	4ft NCF IP65 LED 4800lm (42W) Batten - 4,000K
104	S29694	5ft NCF IP65 LED 2800lm (23W) Batten - 4,000K
105	S29700	5ft NCF IP65 LED 5800lm (50W) Batten - 6,5000K
106	S29697	6ft NCF IP65 LED 3200lm (29W) Batten - 4,000K

107-110 LED IP20 Slimline Battens - 2ft(60cm) to 6ft(180cm) LUMILIFE

- IP Rating: IP20
- Built in LED's
- Opal Plastic Lens
- Colour Temp: 4,000K
- CRI: 80
- Slimline Design
- Retrofit & Easy to Install
- Long cable length (pre-fitted)
 - 2ft = 150mm
 - 4ft,5ft,6ft = 750mm



107	S15075	LED IP20 Batten 2ft / 60cm
108	S15076	LED IP20 Batten 4ft / 120cm
109	S15077	LED IP20 Batten 5ft / 150cm
110	S15078	LED IP20 Batten 6ft / 180cm

111-116 LED Compatible Single / Twin Batten Fittings LUMILIFE

- Iron
- White
- Slimline
- T8 Lampholder
- 220-240V
- ONLY Suitable for LED Tubes
- Single End Connection
- LED Tube not Supplied




111	S8989	LED Compatible 4ft / 120cm T8 - Single	114	S9488	LED Compatible 4ft / 120cm T8 - Twin
112	S8990	LED Compatible 5ft / 150cm T8 - Single	115	S9489	LED Compatible 5ft / 150cm T8 - Twin
113	S9486	LED Compatible 6ft / 180cm T8 - Single	116	S9490	LED Compatible 6ft / 180cm T8 - Twin



117-119 LED Compatible IP65 Single Tri-Proof Batten Fittings LUMILIFE

- Base: ABS (4ft/5ft) PC (6ft)
- PS Diffuser (4ft,5ft)
- PC Diffuser (6ft)
- PC Clips
- T8 Lampholder
- 220-240V
- IP Rating: IP65
- Tri-Proof
- ONLY Suitable for LED Tubes
- Single End Connection
- LED Tube not Supplied

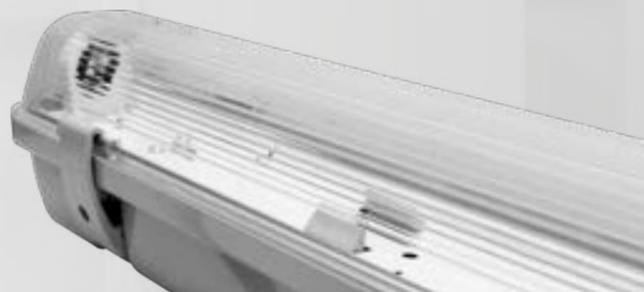

117	S9491	LED Compatible 4ft / 120cm T8 IP65 Single	118	S9493	LED Compatible 5ft / 150cm T8 IP65 Single
118	S9493	LED Compatible 5ft / 150cm T8 IP65 Single	119	S9495	LED Compatible 6ft / 180cm T8 IP65 Single
119	S9495	LED Compatible 6ft / 180cm T8 IP65 Single			



120-122 LED Compatible Twin IP65 Tri-Proof Batten Fittings LUMILIFE

- Base: ABS (4ft/5ft) PC (6ft)
- PS Diffuser (4ft,5ft)
- PC Diffuser (6ft)
- PC Clips
- T8 Lampholder
- 220-240V
- IP Rating: IP65
- Tri-Proof
- ONLY Suitable for LED Tubes
- Single End Connection
- LED Tube not Supplied



120	S9492	LED Compatible 4ft / 120cm T8 IP65 Twin
121	S9494	LED Compatible 5ft / 150cm T8 IP65 Twin
122	S9496	LED Compatible 6ft / 180cm T8 IP65 Twin



123 LED Adjustable PMO PIR Bulkhead - 10W LUMILIFE

- Polycarbonate
- Prismatic PC Lens
- 10W SMD LED
- Anti Corrosive
- Colour Temp: 6,500K
- 220-240V / 50Hz
- Pulsed Manual Override (On/Off/Auto)
- PIR Angle: 100°
- PIR Range: up to 8m
- PIR Time On: up to 4 Minutes
- IP Rating: IP44



123	S9348	LED Adjustable PMO PIR Bulkhead - 10W
-----	-------	---------------------------------------



124 LED Photocell Bulkhead - 10W LUMILIFE

- Polycarbonate
- Prismatic PC Lens
- 10W SMD LED
- Anti Corrosive
- Colour Temp: 6,5 00K
- Dusk to Dawn
- 220-240V / 50Hz
- Fixed Photocell
- IP Rating: IP44



124	S9349	LED Photocell Bulkhead - 10W
-----	-------	------------------------------



125 LED Polycarbonate Bulkheads - 10W

LUMILIFE

- Polypropylene Base
- Polycarbonate Diffuser
- 10W SMD LED
- Colour Temp: 6,500K
- 220-240V
- IP Rating: IP65



125 S8250 LED Polycarbonate Bulkhead - 10W

126-127 LED 20 Globe Festoon Strings - 6W

LUMILIFE

- 6W Coloured or White LED's
- 20 x LED GLS Style Lamps Static LEDs
- Shatterproof Bulb Casing
- Lamp Diameter 50mm
- Hook on Each Lamp
- 5.0m Lead Wire
- 0.5m Between Lamps (9.5m)
- 14.5m Total Length
- 220-240V
- Linkable (4 Sets=80 Globe Lights)
- IP Rating: IP44



126 S9399 LED 20 White Globe Festoon String - 6W

127 S8894 LED 20 Colour Globe Festoon String - 6W

128 LED 10 Light Linkable Festoon String - 16W

LUMILIFE

- 10 x 1.6W LED (20W Total)
- Replaceable Lamps (Supplied)
- Total Length: 9 Metre
- Lead Wire: 3 Metre
- Lamp Spacing: 0.65 Metre
- Cable Type: H05VV-F 2 x 1mm²
- Lampholders: ES/E27
- Hanging Head Design
- 220-240V
- LED Type: Filament Style
- Colour Temp: 2,700K
- Linkable: Up to 5 Sets
- IP Rating: IP44
- Lamp Life: 15,000 Hrs
- EN62471 Approved



128 S17286 LED 10 Light Linkable Festoon String - 16W

129 LED Rechargeable Worklight - 20W

LUMILIFE

- 20W SMD LED
- Colour Temp: 6,000K
- IP54
- 3-Pin Plug Mains Charger
- 12V Car Charger
- Over-Charge Protection
- Up to 3 Hours Operating Time
- From a Full 4 Hour Charge



129 S11567 LED Slimline Rechargeable Worklight - 20W

130 LED 240V Portable Worklight - 20W

LUMILIFE

- 20W SMD LED
- Lumens: 1,600 lm
- IP Rating: IP65
- Colour Temp: 6,500K
- Slimline Design
- Cable Length 180cm
- 220-240V
- Fitted 3-Pin Plug



130 S12120 LED 240V Portable Worklight - 20W

131-132 LED 240V Telescopic Worklight - 20W / 2 x 20W

LUMILIFE

- Colour Temp: 6,500K
- IP Rating: IP65
- Slimline Design
- Cable Length: 300cm
- 220-240V
- Fitted 3-Pin Plug



- 20W SMD LED
- Lumens: 1,600 lm



- 2 x 20W SMD LED
- Lumens: 2 x 1,600 lm



131 S12121 LED 240V Single Tripod Worklight - 20W

132 S12122 LED 240V Twin Tripod Worklight - 2 x 20W

All measurements are approximate

133

LED Fire Rated & IP65 Dimmable & Kelvin Adjustable 5.5W

LUMILIFE

- Wattage: 5.5W
- Lumens per Watt: 91 lm/W
- Lumens: 500 lm
- Dimmable
- 60° Beam Angle
- Colour Temp: Adjustable (3,000K / 4,000K / 6,500K)
- 220-240V
- IP Rating: IP65 Rated (front)
- 30, 60 and 90 Minute Fire Rated
- White Bezel



133 S15344 IP65 Fire Rated CCT Adj Downlight - White

134-135 IP65 Fire Rated Clip on Bezel

LUMILIFE

- Decorative Conversion Bezel for Product S15344
- Available in Chrome or Brushed
- Assorted Finish



134 S15345 IP65 Fire Rated Clip on Bezel - Chrome

135 S15346 IP65 Fire Rated Clip on Bezel - Brushed

136-138 Fire Rated Spring Clip Downlights

LUMILIFE

- Pressed Steel
- Assorted Finish
- 220-240V
- Acoustic Part E
- 30, 60 and 90 Minute Fire Rated
- GU10 Lampholder (Lamp not Supplied)



136 S6590 Fire Rated Spring Clip Downlight - White

137 S6591 Fire Rated Spring Clip Downlight - Chrome

138 S6592 Fire Rated Spring Clip Downlight - Brushed

139-141 Fire Rated T&L Fixed Downlights

LUMILIFE

- Cut-out: 72mm
- Part B (Fire Safety)
- Part C (Resistance to Moisture)
- Part E (Resistance to Sound) compliant
- GU10 Lampholder (Lamp not Supplied)



139 S15499 Fire Rated T&L Fixed DL - Brushed

140 S15500 Fire Rated T&L Fixed DL - Chrome

141 S15501 Fire Rated T&L Fixed DL - White

142-144 Fire Rated Tilt Downlights

LUMILIFE

- Cut-out: 85mm
- Quick connector, hassle-free.
- 30° Tilt (one direction)
- Part B (Fire Safety)
- Part C (Resistance to Moisture)
- Part E (Resistance to Sound) compliant
- GU10 Lampholder (Lamp not Supplied)



142 S15502 Fire Rated Tilt DL - Brushed

143 S15503 Fire Rated Tilt DL - Chrome

144 S15504 Fire Rated Tilt DL - White

145-146 IP65 Slimline Downlight

LUMILIFE

- Die Cast Aluminium
- Frosted Glass
- Assorted Finish
- 220-240V 220-240V
- IP Rating: IP65 (front)
- Acoustic Part E
- Slimline
- GU10 Lampholder (Lamp not Supplied)



145 S7687 IP65 Slimline Downlight - Chrome

146 S7688 IP65 Slimline Downlight - Brushed

All measurements are approximate

147-149 IP65 & Fire Rated Fixed Downlights

LUMILIFE

- Cut-out: 72mm
- Die Cast Aluminium
- Clear Glass
- Assorted Finish
- 220-240V
- IP Rating: IP65 (front)
- Acoustic Part E
- 30, 60 and 90 Minute Fire Rated
- GU10 Lampholder (Lamp not Supplied)



147	S15505	IP65 & Fire Rated Fixed DL - Brushed
148	S15506	IP65 & Fire Rated Fixed DL - Chrome
149	S15507	IP65 & Fire Rated Fixed DL - White



150-151 Four Bar Folding Spotlights

LUMILIFE

- Iron
- Assorted Finish
- 220-240V
- Folding 4 Bar
- 4 x GU10 Lampholder (Lamp not Supplied)



150	S6333	Four Bar Folding Spot - Chrome
151	S6337	Four Bar Folding Spot - Brushed



152-155 Triple Pack Fixed/Tilt Downlight Kits

LUMILIFE

- Aluminium Alloy
- Assorted Finish
- 220-240V
- Pre-Fitted Spring Clips
- 120° Tilt
- 3 x GU10 Lampholder (Lamp not Supplied)



152	S6324	Triple Fixed Downlight Kit - White
153	S6325	Triple Fixed Downlight Kit - Chrome
154	S6326	Triple Fixed Downlight Kit - Brushed
155	S6329	Triple Tilt Downlight Kit - Brushed



156-157 Desk Lamps

LUMILIFE

- Iron & Plastic
- 220-240V
- 1.6m Lead Wire
- On/Off Switch
- ES Lampholder (Lamp not Supplied)



156	S6301	Desk Lamp - Black
157	S6302	Desk Lamp - White



158 Standalone Photocell Sensor

Energizer

- PC Base
- PC Opal Lens
- Ambient Light: ≥ 40 Lux (off)
- Power Consumption: $\geq 0.5W$
- Switching Capacity: 300W
- IP Rating: IP44
- 220-240V ~ 50Hz



158	S13385	Standalone Photocell Sensor
-----	--------	-----------------------------



159 Adjustable Standalone Photocell Sensor

Energizer

- Black ABS
- Auto - Dusk to Dawn
- Adjustable Time - 1, 3, 5, 7 or 12 hours
- Switching Capacity: 1,000W LED
- IP Rating: IP44
- 220-240V ~ 50Hz



159	S12969	Adjustable Standalone Photocell Sensor
-----	--------	--



160 UFO Surface Mounted Adjustable PIR Sensor



- Plastic
- Opal Lens
- Adjust Lux Setting: 3 - 300 / Daylight
- Switching Capacity: 200W LED
- 220-240V ~ 50Hz
- 180° Degree PIR
- PIR Range: 6m
- PIR Angle: 360°
- Time on Period: 10 second - 7 minutes



160 S14428 Surface 360° UFO PIR Sensor

161 PIR Standalone Sensors 180°



- Plastic
- Opal Lens
- Horizontal Movement: 140 Degree
- Vertical Movement: 90 Degree
- Switching Capacity 1,100W
- 220-240V
- 180° Degree PIR
- 12m Range
- IP Rating: IP44



161 S5909 PIR 180° Small Motion Sensor - Black

162-163 Oval Bulkheads



- Polypropylene Base
- Prismatic Glass Lens
- Protective Cage
- 220-240V
- IP Rating: IP44
- ES Lampholder (Lamp not Supplied)



162 S5879 Oval Bulkhead - Black

163 S5880 Oval Bulkhead - White

164 Round Bulkhead



- Polypropylene Base
- Prismatic Glass Lens
- Protective Cage
- 220-240V
- IP Rating: IP44
- ES Lampholder (Lamp not Supplied)



164 S5881 Round Bulkhead - Black

165 Polycarb Bulkhead



- Polypropylene Base
- Polycarbonate Diffuser
- 220-240V
- IP Rating: IP65
- ES Lampholder (Lamp not Supplied)



165 S6354 Polycarb Bulkhead

166-167 6 Sided Wall Lanterns



- Aluminium
- Clear Glass
- 220-240V
- IP Rating: IP44
- ES Lampholder (Lamp not Supplied)



166 S5895 6 Sided Lantern - Black

167 S5896 6 Sided Lantern - White

168 4 Sided Wall Lanterns



- Aluminium
- Clear Glass
- 220-240V
- IP Rating: IP44
- ES Lampholder (Lamp not Supplied)



168 S5897 4 Sided Lantern - Black

169 4 Sided Wall Lantern



- Aluminium
- Leaded Effect Glass
- Black / Silver Finish
- 220-240V
- IP Rating: IP23
- ES Lampholder (Lamp not Supplied)



169 S5901 Leaded 4 Sided Lantern - Black / Silver

170 Stainless Steel Twin Wall Spotlight



- Stainless Steel
- Clear Tempered Glass
- Dual Illumination Light
- 220-240V
- IP Rating: IP44
- 2 x GU10 (Lamps not Supplied)



170 S6831 Twin Wall Spotlight - Stainless Steel

171 SS PIR Twin Wall Spotlight



- Stainless Steel
- Clear Tempered Glass
- Dual Illumination Light
- Motion Sensor: PIR
- PIR Angle: 90°
- Pulsed Manual Override (On/Off/Auto)
- 220-240V
- IP Rating: IP44
- 2 x GU10 (Lamps not Supplied)



171 S8163 PIR Twin Wall Spotlight - Stainless Steel

172-173 PIR 6 Sided Wall Lanterns



- Aluminium
- Clear Glass
- Max. 60W
- IP43
- 220-240V
- PIR Angle: 120°
- PIR Range: up to 8m
- ES Lampholder (Lamp not Supplied)



172 S5902 PIR 6 Sided Lantern - Black

173 S5903 PIR 6 Sided Lantern - White

174-175 PIR 4 Sided Wall Lanterns



- Aluminium
- Clear Glass
- Max. 60W
- 220-240V
- IP Rating: IP43
- PIR Angle: 120°
- PIR Range: up to 8m
- ES Lampholder (Lamp not Supplied)



174 S5904 PIR 4 Sided Lantern - Black

175 S5905 PIR 4 Sided Lantern - White



Call: 0161 872 5151 **Fax:** 0161 872 5454

Email: orders@supreme.co.uk

Order Online: www.supremeled.co.uk

If you are a new customer, please

email: queries@supreme.co.uk
to set up a trade account

Ark, Trafford Wharf Rd, Trafford Park, Manchester M17 1HJ



Scan to view our range

All product specifications are correct for new factory orders only, at the time of printing - September 2024

All stock available from our UK warehouse

PowerMaster is transitioning to LumiLife, during this time current stock may be delivered as PowerMaster